

MACHINES AND TOOLS FOR PIPEWORK PROMOTION

A/2024 valid until 31st July 2024

REMS

for Professionals

**REMS
Catalogue 2024**



Download



UNIVERSAL PRESS TOOL!

REMS Akku-Press 22 V Connected

Connects via Wi-Fi. LED displays the press force and evaluates the pressing operation. Register and control via online portal. Many features including usage control locks and voice recording.

See page 27

NEW

REMS Akku-Press E 22 V ACC

with automatic circuit control. Anti-vibration system. Automatic locking of the pressing tongs.

See page 26

REMS Multi-Push – just one device with more than 10 automatically running flushing and pressure testing programs. Patent EP 2 816 231!

Permanent process monitoring.
Logging.
USB interface.


Patent EP 2 816 231
Patent EP 2 954 960



Info



Info



Pressure testing with compressed air (SL/SLW)



Pressure testing with water (SLW)

REMS Multi-Push SL Set

Electronic flushing and pressure testing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, e.g. for desilting, cleaning and preservation of radiators and area heating systems, flushing and disinfection of drinking water installations, for pressure testing of pipe systems and vessels with compressed air, as a pneumatic pump for controlled filling of all types of vessels with compressed air $p \leq 0.8 \text{ MPa}/8 \text{ bar}/116 \text{ psi}$, and for operation of pneumatic tools $\leq 230 \text{ Nl/min}$. Input and control unit. Piston compressor with crank drive, capacitor motor 230 V, 50 Hz, 1,500 W, person circuit breaker (PRCD). Mobile tubular steel frame. Fastenings for water inputs and outputs of the REMS Multi-Push. Two $\varnothing 1''$ suction/pressure hoses, with fabric inlay, 1.5 m long, with $1''$ hose screw fittings, with caps. One $\varnothing 8 \text{ mm}$ compressed air hose, 1.5 m long, with quick coupling DN 5 and G $\frac{1}{2}''$ hose screw fitting, for pressure testing with compressed air. Connecting hose compressor/water connections, 0.6 m long, with quick coupling DN 7.2 and $1''$ hose screw fitting, $1''$ double nipple, for blowing out water remains from REMS Multi-Push and suction/pressure hoses at the end of work. Without disinfection unit, without cleaning and preservation unit. In a carton. Art.-No. 115610 R220 £ 3,210.00

£ **2,759.00**

REMS Multi-Push SLW Set

Same as REMS Multi-Push SL Set, Art. No. 115610, additionally with hydro-pneumatic water pump for hydrostatic pressure testing of drinking water installations with water in accordance with EN 806-4:2010, test method A, B or C or test method B and for pressure testing of other pipe systems and vessels. One high-pressure hose $\varnothing \frac{1}{2}''$, 1.5 m long, with $\frac{1}{2}''$ hose screw fittings, with caps. In a carton. Art.-No. 115611 R220 £ 4,140.00

£ **2,999.00**

¹⁾ Leak testing of drinking water installations with compressed air in accordance with information leaflet "Leak Testing of Drinking Water Installations" (January 2011) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK). Disinfection of drinking water installations in accordance with EN 806-4:2010 and information leaflet "Flushing, Disinfection and Commissioning of Drinking Water Installations" (August 2014) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK). ²⁾ Leak test of gas installation with compressed air in accordance with technical rules "DVGW-TRGI 2008, Technical Rules for Gas Installations – DVGW Work Sheet G 600" of the DVGW German Association of the Gas and Water Trade, Germany Leak test of gas installation with compressed air in accordance with technical rules "DVGW-TRGI 2018, Technical Rules for Gas Installations – DVGW Work Sheet G 600" of the DVGW German Association of the Gas and Water Trade, Germany



Info

REMS Calc-Push – effective electric decalcifying.

High displacement. 3-way lever for reversal of flow direction, with zero setting.

Useful container volume: 21 l
Displacement: $\leq 30 \text{ l/min}$
Displacement pressure: $\leq 0.1 \text{ MPa}/1.0 \text{ bar}/15 \text{ psi}$
Transport height: $\leq 10 \text{ m}$
Temperature of decalcifying solution: $\leq 50^\circ\text{C}$

REMS Calc-Push

Electric decalcifying pump for effective decalcifying of pipes and containers, e.g. flow heaters, boilers, hot water tanks, cold water tanks, heat exchangers, heating and cooling systems. Displacement $\leq 30 \text{ l/min}$, useful container volume 21 l. Pump unit with condenser motor 230 V, 50 Hz, 165 W. Displacement pressure $\leq 0.1 \text{ MPa}/1.0 \text{ bar}/15 \text{ psi}$. Transport height $\leq 10 \text{ m}$. Flexible $\frac{1}{2}''$, 2.3 m long flexible PVC fabric hoses, with hose screw fittings with Rp $\frac{1}{2}''$ female thread and caps. 2 double nipples $\frac{3}{8}'' - \frac{1}{2}''$, 2 double nipples $\frac{1}{2}'' - \frac{3}{4}''$. In a carton. Art.-No. 115900 R220 £ 860.00

£ **715.00**

REMS Multi-Push S – Flushing with water or a water/air mixture. Easy switching of the air supply during the flushing process when desilting. Permanent process monitoring. Logging. USB interface.




Info

German quality product



Flushing of radiators and area heating systems (S/SL/SLW)



Flushing of drinking water installations (S/SL/SLW)

Patent EP 2 954 960

REMS Multi-Push S Set

Electronic flushing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, e.g. desilting, cleaning and preservation of radiator and flat heater systems, flushing and disinfection of drinking water installations and for operation of pneumatic tools ≤ 230 NI/min. Input and control unit. Piston compressor with crank drive, capacitor motor 230 V, 50 Hz, 1,500 W, person circuit breaker (PRCD). Mobile tubular steel frame. Fastenings for water input and output of the REMS Multi-Push S. Two Ø1" suction/pressure hoses, with fabric inlay, 1.5m long, with 1" hose screw fittings, with caps. Connecting hose compressor/water connections, 0.6 m long, with quick coupling DN 7.2 and 1" hose screw fitting, 1" double nipple, for blowing out water remains from REMS Multi-Push and suction/pressure hoses at the end of work. Without disinfection unit, without cleaning and preservation unit. In a carton. Art.-No. 115810 R220 £ 2,560.00

£ **2,115.00**

Coloured active ingredients for feeding and washing control!



Starter-Set TW-H for disinfection, cleaning and preservation

The active ingredients for disinfection, cleaning and preservation have different colours. The colouring enables you to monitor whether the active ingredients are added completely or washed out again.

Starter-Set TW

For disinfection of drinking water installations. 1 REMS V-Jet TW, 2 REMS Peroxi Color Art.-No. 115852 R £ 483.00

£ **299.00**

Starter-Set H

For cleaning and preserving radiator and surface heating systems. 1 REMS V-Jet H, 2 REMS CleanH, 2 REMS NoCor Art.-No. 115853 R £ 560.00

£ **329.00**

REMS Pull-Push – fast removal of blockages.

High downforce thanks to front adjustable grip handle. 2 adaptor sleeves for optimum adaptation to the problem area: Short sleeve for sinks, basins and baths, long sleeve for toilets.



Info



REMS Pull-Push

Manual suction / pressure pump for fast removal of blockages. With short and long sleeves. In a carton. Art.-No. 170300 R £ 138.00

£ **105.00**

REMS E-Push 2 – electrical filling and testing.

High-pressure hose with fabric inlay prevents falsification of the measuring result. High-pressure reciprocating pump High displacement of 6.5 l/min Adjustable pressure limiting Suction hose with suction filter



Info



Up to 60 bar 1,300 W. Self priming.

REMS E-Push 2

Electric pressure testing pump with pressure gauge for pressure and leak testing of pipe systems and tanks up to 6 MPa/60 bar/870 psi, with adjustable pressure limiting. Pump unit with condenser motor 110 V / 230 V, 50 Hz, 1,300 W. 1.5 m suction hose with ½" connection. 1.5 m high-pressure hose with ½" connection. Return trap. In a carton. Art.-No. 115500 R220 £ 980.00

£ **699.00**

REMS Push – reliably tight.

Brass pressure piston



Tank volume 12 l
up to 60 bar



Stainless steel tank

REMS Push

Manual pressure testing pump with pressure gauge, p ≤ 6 MPa/60 bar/870 psi, for pressure and leak testing of pipe systems and tanks up to 6 MPa/60 bar/870 psi. Corrosion-resistant, powder-coated sheet steel tank for 12 l. 1.5 m high-pressure hose with ½" connection. In a carton.
Art.-No. 115000 R £ 287.00

£ 185.00

REMS Push INOX

Manual pressure testing pump with pressure gauge, p ≤ 6 MPa/60 bar/870 psi, for pressure and leak testing of pipe systems and tanks up to 6 MPa/60 bar/870 psi. Stainless steel tank for 12 l. 1.5 m high-pressure hose with ½" connection. In a carton.
Art.-No. 115001 R £ 369.00

£ 285.00

REMS Solar-Push – filling, flushing and venting in one action. Self priming. High displacement. Ideal for solar power systems, ground heat systems and underfloor heating.

Easy cleaning and simple filling thanks to large opening in the plastic container.

Two practical handles for easy carrying of the plastic container.



German quality product

REMS Solar-Push K 60

Transport volume ≤ 36 l/min, tank volume 30 l. With centrifugal pump, temperature-resistant for continuous load ≤ 60°C. Transport pressure ≤ 0.55 MPa/5.5 bar/80 psi. Condenser motor 230 V / 110 V, 50 Hz, 940 W. 2 pieces flexible, transparent PVC fabric hoses ½" T60, each 3 m long, temperature-resistant ≤ 60°C. On sturdy tubular steel frame with air-filled wheels. In a carton.
Art.-No. 115312 R220 £ 970.00

£ 695.00

REMS Solar-Push I 80

Electric filling and flushing unit for easy and fast filling, flushing and venting of closed systems. Pumping capacity ≤ 27 litres/min, tank volume 30 litres. With impeller pump, temperature resistant during constant use ≤ 80°C. Pumping pressure ≤ 0.65 MPa/6.5 bar/94 psi. Capacitor motor 230 V, 50 Hz, 1000 W. Pressure release valve. 2 flexible EPDM-fabric hoses ½" T100, 3 m long, high temperature resistant ≤ 100°C. On sturdy tubular steel frame with air-filled wheels. In a carton.
Art.-No. 115311 R220 £ 1,180.00

£ 809.00



Fine filter with fine filter bag 70 µm

consisting of screw cap with return connection for return line with ¾" union, adapter, 1 fine filter bag 70 µm, for flushing underfloor heating/wall radiators and clearing sludge
Art.-No. 115220

£ 108.00

Fine filter with fine filter cartridge 90 µm

washable, with large dirt collection vessel, for return line with ¾" union, for flushing underfloor heating/wall radiators and clearing sludge
Art.-No. 115323 R

£ 227.00

Changeover valve flow direction

complete with EPDM fabric hose ½" T100, for flushing underfloor heating/wall radiators and effective clearance of sludge by pressure surges when flow direction changes
Art.-No. 115326 R

£ 301.00

REMS Cobra – Pipe free – quick and easy.

Fast rotater with spiral sections for working lengths up to 70 m. Effective chain spinning and cutting up to 740 rpm. Closed drive spindle protects motor and drive against dirt and water.



German quality product



Description	Art.-No.	£	Offer £
REMS Cobra 22 Set 16 + 22 In a carton.	172012 R220	2,410.00	1,715.00
REMS Cobra 32 Set 22 + 32 In a carton.	174011 R220	4,760.00	3,389.00

REMS Mini-Cobra S – Split-second reversal of direction of spiral feed/return by fast switchover even under full load without changing the direction of rotation of the motor.



0 – 950 rpm
600 W, only 5.2 kg
German quality product

REMS Mini-Cobra S Set

Electric pipe cleaning device with fast switchover, for pipes Ø 20–50 (75) mm. For drain cleaning cables Ø 8 and 10 mm. Drive unit with maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 630 W, high-torque forward and reverse at low speed. Safety tip switch. Stepless, electronic speed control (acceleration switch) between 0 and 950 rpm. Cable drum in shock-proof, glass-fibre reinforced plastic. Cable Ø 8 mm, with core, 7.5 m long. In sturdy steel case.

Art.-No. 170023 R220G £ 690.00

£ **485.00**

REMS Mini-Cobra – Proven, handy device for the fast unblocking of pipes, e.g. for kitchens, bathrooms and toilets.



German quality product



REMS Mini-Cobra

Pipe cleaning device for pipes Ø 20–50 (75) mm, with crank handle and hexagonal driver for conventional drive machine (electric, slow drilling machine with continuous drive or power drill/screwdriver). For pipe cleaning spirals Ø 6, 8 and 10 mm. Spiral drum made of impact-resistant, glass fibre-reinforced plastic. Quick-clamping chuck. Coil Ø 8 mm, 7.5 m long. In a carton.

Art.-No. 170010 R £ 192.00

£ **175.00**



0 – 560 min⁻¹
500 W, only 5.2 kg
German quality product

REMS Mini-Cobra S 22 V VE

Mobile, handy, cordless pipe cleaning device with fast switchover. For effortless and quick application to remove pipe blockages in kitchen, bath, toilet. Li-Ion 22V Technology. For battery and corded operation.

Patent EP 3 059 022



REMS Mini-Cobra S 22 V VE Set

Cordless pipe cleaning device with fast switchover, for pipes Ø 20–50 (75) mm. For drain cleaning cables Ø 8 and 10 mm. Drive unit with powerful, brushless battery motor 21.6 V, 500 W, maintenance-free, robust gear, extra torque powerful left and right hand rotation at low speeds, safety switch. Continuous, electronic speed control (accelerator switch (VE)) from 0 to 560 rpm. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240 V, 50–60 Hz, 70 W. Cable drum in shock-proof, glass-fibre reinforced plastic. Cable Ø 8 mm, with core, 7.5 m long. In L-Boxx system case H.

Art.-No. 170027 R220G £ 960.00

£ **669.00**





Info

REMS 22V
LI-ION TECHNOLOGY
2.5Ah 5.0Ah 9.0Ah

0–560 min⁻¹
500 W, only 1,6 kg

**Chuck range
1,5–13 mm**

REMS Helix 22 V VE – drilling, screw driving and deburring. With powerful, brushless battery motor.



REMS Helix 22 V VE Set

Cordless power drill/screwdriver with Vario-Electronics (VE) for drilling in steel, stone, $\leq \varnothing 13$ mm, wood $\leq \varnothing 32$ mm and other materials and for driving in/loosening screws $\leq \varnothing 8$ mm. Drive machine with keyless quick chuck, clamping range 1.5–13 mm, right and left hand rotation. Electromechanical drive with powerful, brushless battery motor 21.6 V, 500 W, 2-step robust gear. 2 continuously adjustable speed ranges from 0 to 560 rpm and 0 to 1,900 rpm, 15 torque stages plus drilling stage, hard torque of 50 Nm in both speed ranges. Safety switch. Integrated LED work light. Belt clip. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 70 W. 1 bit with double blade slot/cross-head, 50 mm long. In carrying bag.
Art.-No. 190110 R220G £ 520.00

£ **449.00**

REMS MiniScope

Mobile, handy endoscope camera for low-cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes, etc. For cordless operation.



Info

Øx2

REMS MiniScope Set

Mobile, handy endoscope camera for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Controller unit with 2.3" TFT-LCD colour display, 4 batteries 1.5 V, AA, LR6. Camera cable set Color 8-1 with 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet. In sturdy case.
Art.-No. 175401 R6 £ 138.00

£ **99.00**




REMS CamScope HD

Brilliant pictures and videos of cavities, shafts and pipes in HD quality.



Info



REMS CamScope HD Set

Mobile, handy endoscope camera for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Documentation of pictures and videos in HD quality on MicroSD card. Endoscope camera with 5" TFT-LCD colour display, 4x digital zoom, MicroSD card slot, USB port, integrated 3.7 V, 4.0 Ah Li-ion battery. Camera cable set Color 8-1 HD 180°/90°, 180° straight colour camera and 90° angled colour camera, with 1 m formable push cable and add-on hook, add-on magnet. 32 GB MicroSD card. USB cable. In sturdy case.
Art.-No. 175400 R4 £ 245.00

£ **195.00**

**HD quality
(1920 × 1080 pixels)**

REMS CamSys – Mobile, handy camera inspection system for low-cost inspection and damage analysis.



REMS CamSys Set S-Color

Electronic camera inspection system for low-cost inspection and damage analysis. Documentation of pictures and videos on SD card with specification of date and time. Controller unit in microprocessor technology with 3.5" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery, 3.7 V, 4.0 Ah, in sturdy, impact-proof plastic housing, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100–240 V, 50–60 Hz, 15 W, SD card 4 GB, USB cable, in sturdy case. Camera cable set S-Color with high resolution special colour camera Ø 25 mm with CMOS image sensor and push cable.

REMS CamSys Set S-Color 10 K

10 m push cable Ø 4.5 mm with length mark, very flexible, in cable reel. For small pipe diameters and narrow pipe bends Ø (40) 50–150 mm, drains, shafts, stacks and other cavities.

Art.-No. 175008 R220 £ 2,570.00



£ 2,135.00

REMS CamSys Set S-Color 20 H

20 m push cable Ø 4.5 mm, very flexible, in hasp with electronic metre counter. For small pipe diameters and narrow pipe bends Ø (40) 50–150 mm, drains, shafts, stacks and other cavities.

Art.-No. 175007 R220 £ 3,570.00



£ 2,625.00

REMS CamSys Set S-Color 30 H

30 m push cable Ø 5.4 mm, flexible, in hasp with electronic metre counter. For pipes Ø 50–150 mm, drains, shafts, stacks and other cavities.

Art.-No. 175010 R220 £ 3,670.00

£ 2,665.00

REMS CamSys 2 – Mobile, handy camera inspection system for low-cost inspection and damage analysis. Voice recording. Self-levelling camera. Transmitter for localising camera heads.



REMS CamSys 2 Set S-Color – with voice recording.

Electronic camera inspection system for low-cost inspection and damage analysis. Documentation of pictures and videos with voice recording on SD card with specification of date and time. Controller unit in microprocessor technology with 7" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery 3.7 V, 7.6 Ah, in sturdy, impact-proof plastic housing, spray protected, glare protection, stand. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100–240 V, 50–60 Hz, 15 W, SD card 4 GB, USB cable, video cable, in sturdy case. Camera cable set S-Color with high resolution special colour camera with CMOS image sensor and push cable.

REMS CamSys 2 Set S-Color 10 K

High resolution special colour camera Ø 25 mm, 10 m push cable Ø 4.5 mm with length mark, very flexible, in the cable reel. For small pipe diameters and narrow pipe bends Ø (40) 50–150 mm, drains, shafts, stacks and other cavities.

Art.-No. 175301 R220 £ 3,150.00



£ 2,665.00

REMS CamSys 2 Set S-Color 20 H

High resolution special colour camera Ø 25 mm, 20 m push cable Ø 4.5 mm, very flexible, in the hasp with electronic metering. For small pipe diameters and narrow pipe bends Ø (40) 50–150 mm, drains, shafts, stacks and other cavities.

Art.-No. 175302 R220 £ 4,140.00



£ 3,215.00

REMS CamSys 2 Set S-Color S 30 H

High resolution special colour camera Ø 25 mm, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For pipes Ø 50–150 mm, drains, shafts, stacks and other cavities.

Art.-No. 175303 R220 £ 4,360.00



£ 3,435.00

REMS CamSys 2 Set S-Color S-N 30 H

High resolution special colour camera Ø 33 mm, self-levelling, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For pipes Ø 70–150 mm, drains, shafts, stacks and other cavities.

Art.-No. 175304 R220 £ 4,730.00

£ 3,475.00



REMS Explorer

tracker for localising a camera head with a 33 kHz transmitter
Art.-No. 175312 R £ 2,050.00



REMS saw blades

For REMS Puma VE, Cat VE, Tiger/VE/SR, Cat 22V VE, Tiger 22V VE and other makes



Saw blades for free-hand sawing for different materials
Alternating tooth pitch (combi-teeth) for fast, smooth cut, also when sawing mixed materials (wood/metal). Flexible saw blades, also for sawing flush with wall.

REMS Puma VE – the powerful universal saw with anti-vibration system. Quick saw blade change without tools. Adjustable support shoe.

Saw blade can be inserted turned 180°.



REMS Puma VE Set

Electric universal reciprocating saw with Vario-Electronics (VE) for free hand sawing, with anti-vibration system. Drive machine with D-shaped handle with soft grip, maintenance-free oscillation drive, powerful 230 V, 50–60 Hz, 1,300 W universal motor, safety switch, connecting cable 4 m. Continuous electronic stroke speed control (accelerator switch) 0 to 2,800 rpm. 30 mm stroke. Saw blade holder with quick-change system. Adjustable support shoe. Allen key. 1 REMS saw blade 210-1.8/2.5. In sturdy steel case. Art.-No. 560023 R220G £ 402.00

£ **309.00**

REMS Tiger – reciprocating pipe saws

400 % additional sawing force for effortless, super fast sawing!



REMS Tiger
1050 W – only 3 kg



REMS Tiger SR
1400 W – 3,1 kg



German quality product



REMS Tiger 22V VE
500 W – only 3,4 kg



Description		Art.-No.	£	Offer £
REMS Tiger Set In sturdy steel case.	Electric pipe reciprocating saw for fast, easy, right-angled sawing with guide holder and for free-hand sawing.	560020 R220	750.00	609.00
REMS Tiger Set K In sturdy steel case.	Same as Art.-No. 560020 R220, but with 6" chain guide holder.	560021 R110G	830.00	655.00
REMS Tiger SR Set In sturdy steel case.	Electric pipe reciprocating saw with Speed Regulation (SR) for fast, easy, right-angled sawing with guide holder and for free-hand sawing.	560026 R220	850.00	669.00
REMS Tiger SR Set K In sturdy steel case.	Same as Art.-No. 560026 R220, but with 6" chain guide holder.	560028 R110G	920.00	715.00
REMS Tiger 22V VE Set Li-Ion 21.6V, 9.0Ah battery, 100–240V, 50–60 Hz, 90W rapid charger. In sturdy steel case.	Cordless pipe reciprocating saw with Vario Electronics (VE) for effortless, fast, right-angled sawing with guide holder and for free-hand sawing.	560053 R220G	1,390.00	935.00
REMS Tiger 22V VE SetLP Same as Art.-No. 560053, Without battery, without rapid charger. In sturdy steel case.	Cordless pipe reciprocating saw with Vario Electronics (VE) for effortless, fast, right-angled sawing with guide holder and for free-hand sawing.	560055 R22	890.00	685.00
6" chain guide holder	For pipes Ø ½–6" etc.	563203 R	212.00	



Info



German quality product

500 W – 3,1 kg

* ambient temperature approx. 20°C.



REMS Cat 22 V VE – saws everything anywhere. Mobile, handy, light.

Li-Ion 21.6 V, 5.0 Ah battery, for 75 1" steel pipe cuts with one battery charge*.

REMS Cat 22 V VE Set

Cordless universal reciprocating saw with Vario Electronics (VE) for free-hand sawing. Drive unit with spade handle, maintenance-free, water and dust proof oscillation drive with all-round needle bearing crank drive (ANC), aggressive orbital stroke, powerful 21.6 V battery motor, safety switch. Stepless electronic speed control (accelerator switch) 0–1900 rpm. Machine status check with overload protection, temperature monitoring, battery charging status check. Li-Ion 21.6 V, 5.0 Ah, 100–240 V, 50–60 Hz, 90 W rapid charger. Universal saw blade holder. Allen key. 1 REMS universal saw blade 150–1,8 / 2,5. In sturdy steel case.

Art.-No. 560052 R220 £ 1,270.00

£ **775.00**

REMS Cat 22 V VE Set\P

Same as Art.-No. 560052, Without battery, without rapid charger.

Art.-No. 560054 R22 £ 840.00

£ **625.00**


REMS Turbo – burr-reduced, right angle, rapid.





German quality product



Info



Info

Description	Art.-No.	£	+ 1 REMS circular saw blade + 1 stand	Offer £
REMS Turbo Cu-INOX Basic Circular pipe saw with universal double clamping vice for burr-reduced, right angle, rapid sawing.	849006 R220	1,330.00	849X01 R220 	1,245.00
REMS Turbo K Basic Universal circular metal sawing machine with automatic cooling lubricant unit.	849007 R220	1,670.00	849X02 R110G 	1,389.00

REMS Nano – cutting up to Ø 40 mm.



Info



Only 1.9 kg



Info



Only 2.1 kg

German quality product

Accessories REMS Nano / REMS Nano 12 V

REMS cutting wheel Cu-INOX

for pipes of press fitting systems made of: stainless steel, carbon steel, copper

Art.-No. 844050 R

£ **39.40**

REMS cutting wheel V

for multilayer composite tubes

Art.-No. 844051 R

£ **39.40**

L-Boxx system case

with inlay for REMS Nano/Nano 12 V, rapid charger, battery, REMS REG 8–35, 2 x REMS cutter wheels, metre rule

Art.-No. 844045 R

£ **151.00**

Description	Art.-No.	£	Offer £
REMS Nano Basic-Pack Electric pipe cutting machine for fast, right angled cutting of pipes Ø 10–40 mm, without outer burr.	844010 R220	550.00	469.00
REMS Nano 12 V Basic-Pack Cordless pipe cutting machine for fast, right angled cutting of pipes Ø 10–40 mm, without outer burr.	844011 R220	730.00	569.00

REMS RAS St – Robust quality tool for cutting steel pipes. Meets high demands and long service life.



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
REMS RAS St ½–2" *	½–2" 10–60	113000 R	235.00	171.00
REMS RAS St 1¼–4" *	1¼–4" 30–115	113100 R	427.00	327.00

REMS RAS W INOX – Highly resistant quality tool for cutting corrugated metal hoses (corrugated pipes) made of stainless steel, also jacketed.



Description	Pipes	Art.-No.	£	Offer £
REMS RAS W INOX 10-32/40 S on needle bearings	DN 10–32 (40) / ¾–1½" (2")	113450 R	224.00	165.00

REMS RAS Cu – Robust quality tools for cutting tubes. Ideal for cutting copper pipes.

Quick adjustment of the engagement spindle in both directions. Compact design for tough use. Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
Cu 3–16	3–16 ½–¾"	113250 R	29.50	23.00
Cu 3–25	3–25 ½–1"	113255 R	35.70	29.00
Cu 3–28	3–28 ½–1½"	113260 R	40.80	33.20

REMS RAS Cu-INOX – Robust quality tools for cutting tubes. Ideal for cutting copper pipes, thin-walled, stainless steel pipes, thin-walled steel, aluminium and brass pipes.

Compact design for tough use. Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
Cu-INOX 3–16	3–16 ½–¾"	113200 R	29.50	27.00
Cu-INOX 3–25	3–25 ½–1"	113230 R	35.70	30.10
Cu-INOX 3–28 Mini	3–28 ½–1½"	113240 R	40.80	36.30
Cu-INOX 3–28	3–28 ½–1½"	113300 R	34.70	29.00

REMS RAS P/SW 45/L – Robust quality tool with two cutting systems for cutting and slitting plastic corrugated protective pipes.



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
REMS RAS P/SW 45/L	≤ 45 mm / ≤ 1¾"	113480 R	58.70	46.70

REMS RAS P – the compact version with telescopic spindle. Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use. Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
P 10–32 T	10–32 ½–1¾"	290001 R	59.80	48.80
P 10–40 T	10–40 ½–1¾"	290002 R	71.80	57.10



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
Cu 3–35	3–35 ½–1¾"	113340 R	59.80	45.70
Cu 3–42	3–42 ½–1¾"	113320 R	71.80	54.00
Cu 8–42 * with quick adjustment	8–42 ¾–1¾"	113370 R	160.00	115.00
Cu 8–64 * with quick adjustment	8–64 ¾–2½"	113410 R	192.00	133.00



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
Cu-INOX 3–35	3–35 ½–1¾"	113350 R	63.00	42.60
Cu-INOX 3–42	3–42 ½–1¾"	113330 R	79.10	53.00
Cu-INOX 6–42 *	6–42 ¼–1¾"	113380 R	164.00	129.00
Cu-INOX 6–64 *	6–64 ¼–2½"	113400 R	192.00	151.00

REMS RAS P – High performance quality tools for cutting pipes. With quick adjustment.

Ideal for cutting plastic and composite pipes.

Very stable spindle, long spindle guide and specially hardened back pressure rollers. Exact guiding on the pipe, easy engagement, easy cutting and accurate, right-angled cut as a result. Quick adjustment of the engagement spindle in both directions.



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
P 10–40 * with quick adjustment	10–40 ½–1½"	290050 R	160.00	122.00
P 10–63 * with quick adjustment	10–63 ½–2"	290000 R	203.00	134.00
P 50–110, s11 * with quick adjustment	50–110 2–4"	290100 R	242.00	185.00
P 50–125, s16 with quick adjustment	50–125 2–5"	290500 R-S16	250.00	192.00
P 110–160 * with quick adjustment	110–160 4–6"	290200 R	299.00	234.00

REMS RAS Cu-INOX S – Robust quality tools for cutting tubes.

Ideal for cutting copper pipes, thin-walled, stainless steel pipes, thin-walled steel, aluminium and brass pipes.



Description	Pipes Ø inch/mm	Art.-No.	£	Offer £
Cu-INOX 3–28 S Mini on needle bearings	3–28 ¼–1½"	113241 R	57.50	47.80
Cu-INOX 3–35 S on needle bearings	3–35 ¼–1¾"	113351 R	84.40	57.00
Cu-INOX 8–42 S * on needle bearings, with quick adjustment	8–42 ¾–1¾"	113385 R	169.00	115.00
Cu-INOX 8–64 S * on needle bearings, with quick adjustment	8–64 ¾–2½"	113401 R	213.00	152.00

REMS ROS PEX 28 S – Robust quality tool for clean, fast cutting of pipes in one cut.

Stable magnesium version. For one-hand operation. Ideal for cutting PEX pipes.



Description	Pipes ≤ Ø mm/inch	Art.-No.	£	Offer £
REMS ROS PEX 28 S	28 / 1½"	291420 R	90.00	68.50

REMS ROS P 26 / SW 35 S – Robust quality tool for clean, fast cutting of pipes in one cut.

With integrated pipe cutter for protective corrugated tubes. Stable magnesium version. For one-hand operation. Ideal for cutting composite pipes and PEX pipes.



Description	Pipes ≤ Ø mm/inch	Art.-No.	£	Offer £
REMS ROS P 26/SW 35 S	P 26/1" SW 35/1¾"	291242 R	120.00	85.00

REMS ROS P – Handy quality tools for clean, fast pipe cuts. For thin-walled pipes also. Sturdy aluminium/magnesium version. For single-hand operation. Ideal for cutting plastic and composite pipes.



Description	Pipes ≤ Ø mm/inch	Art.-No.	£	Offer £
P 26	26 1"	291240 R	59.10	46.70
P 35 with quick reverse	35 1¾"	291200 R	64.00	53.00
P 35 A with automatic quick reverse	35 1¾"	291220	81.50	67.50
P 42 with quick reverse	42 1½"	291250 R	141.00	90.30



Description	Pipes ≤ Ø mm/inch	Art.-No.	£	Offer £
P 42 PS with quick reverse	42 1½"	291000 RPS	86.40	69.60
P 42 S with quick reverse	42 1½"	291010 R	97.30	71.70
P 63 P with quick reverse	63 2"	291270 R	170.00	135.00
P 63 S with quick reverse	63 2"	291290 R	187.00	135.00

REMS ROS P flex – Robust quality tool for clean, fast cutting of pipes in one cut.



Stable magnesium version. For one-hand operation. Ideal for cutting flexible plastic hoses and soft plastic pipes.

Description	Pipes ≤ Ø mm/inch	Art.-No.	£	Offer £
P flex 14	14 9/16"	291400 R	55.10	41.60
P flex 22	22 ¾"	291410 R	61.60	47.80
P flex 28 S on needle bearings	28 1½"	291430 R	86.70	65.40

REMS Cento / REMS Cento 22 V – Cutting and deburring up to Ø 115 mm.
Right-angled. Chipless. Without outer burr. Dry. Ultra-fast, e.g. INOX Ø 54 mm in only 4 seconds.

Unique! Patent EP 1 782 904
Driven cutting wheel and straight in-feed
for fast cutting

1200 W
Only 17 kg

German quality product



FREE



REMS Cento Basic

Pipe cutting machine for fast, right angled cutting of pipes Ø 8–115 mm, without outer burr. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 8–108 mm. For steel pipes EN 10255 (DIN 2440) DN 6–100, Ø ½–4", Ø 10–115 mm, cast iron pipes (SML) EN 877 (DIN 19522) DN 50–100, plastic tubes SDR 11, wall thickness s ≤ 10 mm, Ø 10–110 mm, Ø ½–4", composite tubes Ø 10–110 mm. With maintenance-free gear, proven 110 V, 50–60 Hz, 1200 W universal motor. Speed 115 rpm. Rollers made of hardened precision steel for pipes Ø 22–115 mm, Ø ¾–4". Safety foot switch. Ring spanner. Without cutting wheel. For workbench, stand or wheel stand. In a carton.
Art.-No. 845001 R220 £ 1,510.00

REMS cutting wheel Cu-INOX free!

Value £ 115.00

Art.-No. 845X02 R220 £

1,229.00

REMS Cento 22 V – Li-Ion 21.6 V, 5.0 Ah battery, for 280 cuts
of Ø 22 mm stainless steel press fitting system pipe with
one battery charge*.

REMS Cento 22 V Basic

Cordless pipe cutting machine for fast, right angled cutting of pipes Ø 8–115 mm, without outer burr. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 8–108 mm. For steel pipes EN 10255 (DIN 2440) DN 6–100, Ø ½–4", Ø 10–115 mm, cast iron pipes (SML) EN 877 (DIN 19522) DN 50–100, plastic tubes SDR 11, wall thickness s ≤ 10 mm, Ø 10–110 mm, Ø ½–4", composite tubes Ø 10–110 mm. With maintenance-free gear, powerful 21.6 V battery motor. Speed 84 rpm. Machine status check with overload protection, temperature monitoring, battery charging status check. Rollers made of hardened precision steel for pipes Ø 22–115 mm, Ø ¾–4". Safety foot switch. Li-Ion 21.6 V, 5.0 Ah, 100–240 V, 50–60 Hz, 90 W rapid charger. Ring spanner. Without cutting wheel. For workbench, stand or wheel stand. In a carton.
Art.-No. 845002 R220 £ 2,120.00

REMS cutting wheel Cu-INOX free!

Value £ 115.00

Art.-No. 845X04 R220 £

1,539.00

REMS Cento 22 V Basic\P

Same as Art.-No. 845002. Without battery,
without rapid charger. Without cutting wheel.
Art.-No. 845007 R22 £ 1,780.00

£ 1,349.00

* ambient temperature approx. 20°C.



Inside pipe deburring device up
to DN 100 – ideal for pipes of the
pressfitting systems etc.

Patent EP 2 500 122

REMS REG 28–108

Inside pipe deburring device for pipes of Ø 28–108 mm, Ø ¾–4". For electrical rotary
drive by the cutting wheel of the pipe cutting machine REMS Cento, REMS Cento 22 V
(with REMS cutting wheel art. no. 845050 or 845053).

Art.-No. 113840 R £ 344.00

£ 289.00



Patent EP 2 058 067

REMS REG 10–54 E – also for electric drive

Outer/inner pipe burr remover for pipes Ø 10–54 mm, ½–2½". Also for electric drive by
REMS Helix 22 V VE and other power drills/screwdrivers (speed ≤ 300 rpm), by the REMS
Cento (from date of manufacture 09/2011) and REMS Cento 22 V pipe cutting machines
or by the REMS Turbo Cu-INOX pipe circular sawing machine (from date of manufacture
09/2011).

Art.-No. 113835 R £ 145.00

£ 112.00





Accessories REMS Cento / REMS Cento 22 V



Cento



Cento 22 V

L-Boxx H system case
for REMS Cento / REMS Cento RF
Art.-No. 845085 R

£ 148.00

Accessory Pack 1
consisting of stand and REMS Herkules 3B
Art.-No. 120X01 R £ 570.00

£ 420.00

Accessory Pack 2
consisting of Jumbo, Herkules 3B and Herkules Y
Art.-No. 120X02 R £ 1,020.00

£ 714.00

Accessory Pack 3
consisting of Jumbo E and Herkules 3B
Art.-No. 120X03 R £ 650.00

£ 474.00

Accessory Pack 4
consisting of wheel stand and REMS Herkules 3B
Art.-No. 120X04 R £ 710.00

£ 503.00

REMS REG – Robust quality tool for removing outer and inner burr from pipes.



Info

REMS REG 8–35

Outer/inner pipe burr remover for pipes Ø 8–35 mm, ¾–1 ½".
Art.-No. 113825 R £ 69.00

£ 54.00



Info

REMS REG 10–54

Outer/inner pipe burr remover for pipes Ø 10–54 mm, ½–2 ¼".
Art.-No. 113830 R £ 78.50

£ 61.30

Patent EP 2 058 067



Info

REMS REG 10–54 E – also for electric drive

Outer/inner pipe burr remover for pipes Ø 10–54 mm, ½–2 ¼". Also for electric drive by REMS Helix 22 V VE and other power drills/screwdrivers (speed ≤ 300 rpm), by the REMS Cento (from date of manufacture 09/2011) and REMS Cento 22 V pipe cutting machines or by the REMS Turbo Cu-INOX pipe circular sawing machine (from date of manufacture 09/2011).
Art.-No. 113835 R £ 145.00

£ 112.00

REMS DueCento – Cutting up to Ø 225 mm.

Right angled. Chip-free. Ready for welding. Fast.
Without outside burr. Dry. Universal for many pipe types.

Unique! Patent EP 1 782 904

Driven cutting wheel and straight in-feed for fast cutting



Info

German quality product



REMS DueCento Basic

Pipe cutting machine for fast, right angled cutting of pipes Ø 40–225 mm, without outside burr. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 54–225 mm. For steel pipes EN 10255 (DIN 2440) DN 40–150, Ø 1 ½–6", cast pipes (SML) EN 877 (DIN 19522) DN 50–200, plastic tubes SDR 11, wall thickness s ≤ 21 mm, Ø 40–225 mm, Ø 1 ¼–8", composite tubes Ø 40–110 mm. With maintenance-free gears, proven universal motor 110 / 230 V, 50–60 Hz, 1,200 W. Speed 115 rpm. Hardened, precision tubular steel rollers for pipes Ø 100–225 mm, Ø 4–6". Safety foot switch. Ring spanner. Without cutter wheel. 2 height adjustable pipe supports 1 for pipes Ø 100–225 mm, Ø 4–8". In a carton.
Art.-No. 845004 R220 £ 2,990.00

FREE

Super offer!

You get 3 cutting wheels of your choice free when you buy a REMS DueCento Basic! An additional saving of between £ 345.00 and £ 435.00.



Art.-No. 845X03 R220 £ 2,749.00



REMS KaliGrat E – Robust, quality tool for calibration and outer/inner deburring of pipes. For manual operation or electric drive.

Simultaneous calibration and outer/inner deburring. Ratchet handle with changeable calibrating and deburring heads, with quick-change holder.

REMS KaliGrat E Set

Calibrating tool and outer/inner deburrer, for manual operation or electric drive. For composite tubes Ø 14–63 mm. Ratchet handle with quick-change holder with spring locking, calibrating and deburring heads. In sturdy case.

Version Ø mm × wall thickness mm	Art.-No.	£	Offer £
Set 16×2 + 20×2 + 25×2,5/26×3	114000 R	352.00	259.00
Set Allround 26 14×2 + 16×2 + 16×2,25 + 18×2 + 20×2 + 20×2,25 + 20×2,5 + 25×2,5/26×3	114001 R	660.00	489.00



Info



REMS KaliGrat R – Robust, quality tools for calibration and inner deburring of pipes, free hand.

Simultaneous calibration and inner deburring. Ratchet handle with graduated calibrating pin with integrated deburring blades.



Info

REMS KaliGrat R Set

Calibrating tool and inner pipe deburrer. For composite tubes Ø 16–63 mm. Ratchet handle with calibrating pin for different different diameters and wall thicknesses, with integrated deburring blades. In blister pack.

Version Ø mm × wall thickness mm	Art.-No.	£	Offer £
R4 16×2 + 20×2 + 25×2,5/26×3 + 32×3	114045 R	101.00	75.00
R4 16×2 + 20×2,25 + 25×2,5/26×3 + 32×3	114046 R	101.00	75.00
R3 40×3,5 + 50×4 + 63×4,5	114047 R	202.00	145.00
R3 40×4 + 50×4,5 + 63×6	114048 R	202.00	145.00

REMS KaliGrat H – Robust, quality tools for calibration and outer/inner deburring of pipes.

Simultaneous calibration and outer/inner deburring. Start handle with calibrating pins and deburring blades.



Info

REMS KaliGrat H Set

Calibrating tool and outer/inner pipe deburrer. For composite tubes Ø 16–26 mm. In blister pack.

Version Ø mm × wall thickness mm	Art.-No.	£	Offer £
16×2 + 20×2 + 26×3	114060 R	120.00	89.00
16×2 + 20×2 + 25×2,5	114061 R	120.00	89.00

NEW



Rugged quality tools for tough use
and long service life.



REMS Catch S 1" + S 1½" + W 240

Swedish pattern wrench 'S': DIN 5234 –
Form C. Water pump pliers,
7 grip positions. DIN ISO 8976.
Art.-No. 116X01 R £ 165.00

£ **90.00**

Rugged design in chrome-vanadium steel, all steel,
drop forged, tempered, powder-coated. Hardened,
highly wear resistant toothting.



REMS Catch S 1" + S 1½" + S 2"

Swedish pattern wrench 'S': DIN 5234 – Form C.
Art.-No. 116X02 R £ 237.00

£ **127.00**

REMS Aquila 3B
Mobile pipe machining station. Safe clamping
of pipes up to 6". Everywhere on site.

Ø 10–165 mm, ¼–6"



REMS Aquila 3B

Pipe workstation with chain pipe vice for clamping pipes,
solid material, Ø 10–165 mm, Ø ¼–6". Work plate with
integrated chain pipe vice with double clamping jaws,
pipe rest, tool holders, 3 benders for bending pipes
Ø 10–26 mm, Ø ¾–¾", clamping head. Folding tripod
stand with shelf plate. Load capacity ≤ 450 kg.
In a carton.
Art.-No. 120270 R £ 550.00

£ **359.00**

REMS Aquila WB
Safe clamping of pipes up to 6".

Ø 10–165 mm, ¼–6"



German quality product

REMS Aquila WB

High quality chain pipe vice for clamping pipes, solid material, Ø 10–165 mm, Ø ¼–6".
Base plate with integrated chain pipe vice with double clamping jaws, pipe rest, bending
device. For work bench. In a carton.
Art.-No. 120250 R £ 320.00

£ **235.00**



**REMS Herkules XL 12" – extra stable
for pipes up to 12".**



REMS Herkules XL 12"

Height adjustable, fold-up for pipes, solid material Ø 1¼–12", Ø 42–324 mm.
Load capacity ≤ 450 kg. In a carton.
Art.-No. 120125 R £ 374.00

£ **275.00**



Info



REMS Lumen – electric lighting. With high light intensity. Handy, light. Continuous swivel.

REMS Lumen 5000

Electric LED flood light with high light intensity. 230 V, 50–60 Hz.
Light flux \leq 5,000, Power \leq W 50. 5 m connecting lead. In a carton.
Art.-No. 175220 R220G £ 84.50

£ **63.30**

REMS Lumen 7000

Electric LED flood light with high light intensity. 230 V, 50–60 Hz.
Light flux \leq 7,000, Power \leq W 70. 5 m connecting lead. In a carton.
Art.-No. 175221 R220G £ 102.00

£ **76.80**

REMS Lumen 10000

Electric LED flood light with high light intensity. 230 V, 50–60 Hz.
Light flux brightness stage 1 \leq 5,000, Power \leq W 50.
Light flux brightness stage 2 \leq 10,000, Power \leq W 100.
5 m connecting lead. In a carton.
Art.-No. 175222 R220G £ 128.00

£ **92.40**

REMS 3B telescopic stand

on a tripod, height-adjustable, collapsible
Art.-No. 175230 R

£ **32.00**

REMS Lumen 2800 22 V – lights everywhere. With high light intensity. Mobile, handy, light. For battery and corded operation. Continuous swivel.

REMS 22V
LI-ION TECHNOLOGY
2,5 Ah 5,0 Ah 9,0 Ah



Description	Operating hours h		
	Stage 1	Stage 2	Stage 3
Battery Li-Ion 21.6 V. 2.5 Ah	5.4	2.4	1.6
Battery Li-Ion 21.6 V. 5.0 Ah	10.9	4.8	3.2
Battery Li-Ion 21.6 V. 9.0 Ah	19.6	8.6	5.7



Info

REMS Lumen 2800 22 V Set Power-Edition.

Cordless LED flood light with high light intensity. For battery and corded operation. Light flux \leq 2,800 lm. Voltage supply 220–240 V, 50–60 Hz, 138 W. Without battery, without rapid charger. In a carton.

Art.-No. 175210 R220G £ 149.00

£ **115.00**

REMS Lumen 2800 22 V Set

Cordless LED flood light with high light intensity. For battery and corded operation. Light flux \leq 2,800 lm. Battery Li-Ion 21.6 V, 1.5 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 70 W. Voltage supply 220–240 V, 50–60 Hz, 138 W. In a carton.

Art.-No. 175211 R220G £ 470.00

£ **310.00**

REMS 3B telescopic stand

on a tripod, height-adjustable, collapsible
Art.-No. 175230 R

£ **32.00**

REMS Contact 2000 – the smallest, strongest and fastest unit of its kind.



Operating power = soldering power = 2,000 W!
Therefore soldering time e.g. for \varnothing 18 mm only 18 s.



Info

REMS Contact 2000 Super-Pack

Electric soldering unit for soft soldering of copper tubes \varnothing 6–54 mm, \varnothing $\frac{1}{4}$ – $2\frac{1}{2}$ ". 230 V or 110 V, 50–60 Hz, 2000 W, control voltage 24 V. Soldering pliers with 4 m cable length, safety transformer, 4 prism electrodes, 2 rod electrodes, 250 g quality soft solder REMS Lot Cu 3, 250 g quality soft solder paste REMS Paste Cu 3, 1 tubing cutter REMS RAS Cu-INOX 3-35, pack of 10 cleaning pads REMS Cu-Vlies. In sturdy steel case.
Art.-No. 164050 R220 £ 1,030.00

£ **889.00**



German quality product

up to
2"



High cooling performance, e.g. $\frac{3}{4}$ " steel pipe in just 9 min*.



German quality product

*ambient/water temperature approx. 20°C.

REMS Frigo 2 F-Zero – electrically freeze instead of emptying. Ultra-fast up to 2".



Info

One-piece freezing heads for the main working range $\frac{1}{4}$ – 1" or $\frac{1}{2}$ – 35 mm, no reducer inserts required. Very compact freezing heads with specially geometrically designed recesses for holding the respective different pipe diameters. Very narrow, only 50 mm wide. Can be used everywhere, even in narrow places. No pastes/greases required.

REMS Frigo 2 F-Zero Set

Electrical pipe freezing device with closed coolant circuit. For steel, copper, plastic, multilayer composite pipes, $\frac{1}{4}$ – 2", $\frac{1}{2}$ – 60 mm. Cooling unit 110 V, 50 Hz, 430 W, 2 coolant hoses, 2.5 m long, 2 clamping straps, 2 LCD digital thermometer, spray bottle. Equipment for $\frac{1}{4}$ – 1 $\frac{1}{4}$ ", 15 – 42 mm. In sturdy steel housing. In a carton.

Art.-No. 131012 R110G £ 1,920.00

£ **1,229.00**



Upgrade kit 1 $\frac{1}{2}$ – 2" / 54 – 60 mm

Art.-No. 131160 R

£ **267.00**

up to
2"



German quality product

*ambient/water temperature approx. 18°C.

REMS Eskimo – freezing instead of draining. Super fast. Automatic refrigerant feed.

Very narrow, indestructible freezing sleeves. High cooling performance, e.g. $\frac{3}{4}$ " steel pipe in just 4 min.*



Info

REMS Eskimo Set

Pipe freezing device for carbon dioxide coolant. For steel, cast iron, lead, copper, plastic pipes $\frac{1}{4}$ – 2", $\frac{1}{2}$ – 60 mm. Two freezing jackets each in 10 different sizes for the whole working range, flange connection with T-junction, locking nut, 2 handles with injector, 2 high-pressure hoses. In sturdy carrying case.

Art.-No. 130002 R £ 620.00

£ **429.00**



Work plate 1100 × 700 × 26 mm
Working height 800 mm
Weight 28 kg
Load capacity ≤ 300 kg

Work plate 800 × 600 × 22 mm
Working height 800 mm
Weight 23 kg
Load capacity ≤ 300 kg

REMS Jumbo – assembled and disassembled at lightning speed.



Info

REMS Jumbo

Folding workbench with toggle catch. Work plate in accordance with DIN 68 705.

In a carton.

Art.-No. 120200 R £ 459.00

£ **289.00**

REMS Jumbo E

Folding workbench with toggle catch. Work plate in accordance with DIN 68 705.


In a carton.

Art.-No. 120240 R £ 299.00

£ **217.00**



German quality product

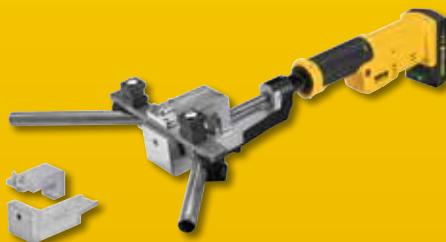

NEW

REMS Hydro-Swing 22 V – bending tubes where they are installed. Mobile, handy, light. Universally usable for many pipe types.

Li-Ion 21.6 V, 2.5 Ah battery, for approx. 110 stainless steel pipe bends of the Ø 22 mm press fitting systems with one battery charge*.

REMS Hydro-Swing 22 V

Cordless tube bender Ø 10–32 mm, Ø 3/8–1/2", up to 90°. Soft copper pipes Ø 10–22 mm, Ø 3/8–1/2", s ≤ 1 mm, soft, coated copper pipes Ø 10–18 mm, Ø 3/8–1/2", s ≤ 1 mm, pipes of the press fitting systems made of soft coated carbon steel Ø 12–18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10–18 mm, s ≤ 1.5 mm, composite tubes Ø 14–32 mm. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger Li-Ion 220–240 V or 110 V, 50–60 Hz, 70 W. Up to Ø 26 mm with bending formers, back former support H-S Ø 10–26 mm with back formers. Up to Ø 32 mm with bending formers, 2 back former supports Ø 10–26 mm and Ø 32 mm with back formers. In XL-Boxx system case.

Soft copper pipes etc.

Set 12 + 15 + 18 + 22

Art.-No. 153410 RX22G £ 1,440.00

£ **1,139.00**

Composite tubes etc.

Set 16 + 18 + 20 + 25/26 + 32

Art.-No. 153417 R220G £ 1,640.00

£ **1,239.00**

Composite tubes, Soft copper pipes etc.

Set 10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22 + 25/26 + 32,

3/8 + 1/2 + 5/8 + 3/4 + 1/2"

Art.-No. 153418 RX22G £ 1,840.00

£ **1,399.00**

REMS Hydro-Swing 22 V INOX

REMS Hydro-Swing 22 V with aluminium bending formers, especially also for Geberit Mapress Stainless Steel (EN 10088, 1.4401), Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free), Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)), Viega Sanpress (EN 10088, 1.4401), Viega Prestabo (EN 10305-3, 1.0308 (E235)).

Pipes for press fitting systems made of stainless steel, Soft copper pipes etc.

Set 15+18+22

Art.-No. 153419 R220G £ 1,530.00

£ **1,185.00**

Hydro-Swing 22 V Basic-Pack\P

Without battery, without rapid charger.

Without bending formers, without back former supports.

In XL-Boxx system case.

Art.-No. 153402 R22 £ 810.00

£ **655.00**

Device H-S

for reverse bending on laid pipes up to Ø 26 mm, 3/8"

Art.-No. 153450 R

£ **245.00**

* ambient temperature approx. 20°C.

REMS Swing – Bend pipes where they are laid, up to Ø 32 mm.

Ultra fast operation by practical multifunction lever for fast in-feed and fast return. Hardened steel rack.



German quality product

REMS Swing Set 16 + 20 + 25 / 26 + 32

Soft copper pipes Ø 10–22 mm, Ø 3/8–1/2", s ≤ 1 mm, soft, coated copper pipes Ø 10–18 mm, Ø 3/8–1/2", s ≤ 1 mm, soft, coated carbon steel pipes of the pressfitting systems Ø 12–18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10–18 mm, s ≤ 1 mm, composite tubes Ø 14–32 mm. Up to Ø 26 mm with drive unit, bending formers, back former supports S Ø 10–26 mm with back formers, in a sturdy steel box/case. Up to Ø 32 mm with drive unit, bending formers, 2 back former supports Ø 10–26 mm and Ø 32 mm with back formers, in a sturdy steel case.

Art.-No. 153029 R £ 590.00

£ **415.00**

REMS Swing UP Set 16 + 20 + 25 + 32

Single-hand tube bender Ø 16–32 mm, up to 90°, for Uponor Uni Pipe PLUS composite pipes Ø 16–32 mm. With UP drive unit, UP bending formers with smaller bending radii, UP back former supports Ø 16–32 mm with back formers, in a sturdy steel box/case.

Art.-No. 153030 R £ 570.00

£ **429.00**



Info

German quality product



NEW

REMS Hydro-Swing – Effortless working due to oil-hydraulic force transmission. Ideal for composite tubes up to Ø 32 mm.

Also for stainless steel pipes up to Ø 22 mm.

REMS Hydro-Swing

Oil-hydraulic hand pipe bender Ø 10–32 mm, Ø ¼–¾", up to 90°. Soft copper pipes Ø 10–22 mm, Ø ¼–¾", s ≤ 1 mm, soft, coated copper pipes Ø 10–18 mm, Ø ¼–¾", s ≤ 1 mm, pipes of the press fitting systems made of soft coated carbon steel Ø 12–18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10–18 mm, s ≤ 1.5 mm, composite tubes Ø 14–32 mm. Up to Ø 26 mm with drive unit, bending formers, back former support H-S Ø 10–26 mm with back formers, in a sturdy steel case. Up to Ø 32 mm with drive unit, bending formers, 2 back former supports Ø 10–26 mm and Ø 32 mm with back formers, in a sturdy steel case.

Soft copper pipes etc.

Set 12 + 15 + 18 + 22

Art.-No. 153525 RX £ 730.00

Composite tubes etc.

Set Set 16+20+25/26+32

Art.-No. 153529 R £ 810.00

Composite tubes, Soft copper pipes etc.

Set 10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22 + 25/26 + 32, ¾ + ½ + ¾ + ¾ + ¾"

Art.-No. 153528 RX £ 890.00

REMS Hydro-Swing INOX

REMS Hydro-Swing with aluminium bending formers, especially also for Geberit Mapress Stainless Steel (EN 10088, 1.4401), Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free), Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)), Viega Sanpress (EN 10088, 1.4401), Viega Prestabo (EN 10305-3, 1.0308 (E235)).

Pipes for press fitting systems made of stainless steel, Soft copper pipes etc.

Set 15 + 18 + 22

Art.-No. 153510 R £ 800.00

Device H-S

for reverse bending on laid pipes up to Ø 26 mm, ¾"

Art.-No. 153450 R

£ **519.00**

£ **559.00**

£ **725.00**

£ **589.00**

£ **245.00**



German quality product



Tripod (accessory)

REMS Python – save expensive fittings. Super easy bending up to Ø 2", Ø 75 mm.



Info

REMS Python

Oil-hydraulic pipe bender for dimensionally accurate bending of pipes up to 90°. Steel pipes EN 10225 Ø ¾–2", multilayer composite tubes Ø 32–75 mm. Drive unit with back former supports, upper back former support with laterally adjustable back former support bearing plate, 2 back formers, bending formers St or V. In sturdy transport case.

Steel pipes

Set St ¾ + ½ + ¾ + 1 + 1 ¼"

Art.-No. 590020 R £ 1,730.00

Steel pipes

Set St ½ + ¾ + 1 + 1 ¼ + 1 ½ + 2"

Art.-No. 590021 R £ 1,870.00

Multilayer composite tubes

Set V 40 + 50 + 63 mm

Art.-No. 590022 R £ 1,760.00

Tripod

Art.-No. 590150 R

Bending former and back formers 75 mm

Art.-No. 590063 R

£ **1,275.00**

£ **1,349.00**

£ **1,315.00**

£ **174.00**

£ **730.00**

REMS Curvo / REMS Curvo 22 V – Bending pipes up to Ø 40 mm, 180°.

REMS Curvo– Bending instead of expensive fittings!
The cost of REMS Curvo is recovered just after a few bends.
Without vice.
Ready to use immediately without setting.



Info



1000 W – only 8 kg
German quality product

REMS Curvo

Electric pipe and tube bender Ø 10–40 mm, Ø ¼–1½", up to 180°. Hard, semi-hard, soft copper pipes, also thin-walled, Ø 10–35 mm, Ø ¼–1½", soft coated copper pipes, also thin-walled, Ø 10–18 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1 Ø ¾–1½", pipes of the press fitting systems of stainless steel Ø 12–28 mm, carbon steel, also coated, Ø 12–28 mm, soft precision steel pipes Ø 10–28 mm, steel pipes EN 10255 Ø ¼–¾", electrical installation pipes EN 50086 Ø 16–32 mm, composite tubes Ø 14–40 mm, etc. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation, insert bolt. Bending formers and back formers¹. In sturdy steel case.

REMS Curvo	Art.-No.	£	Offer £
Basic-Pack	580010 R220	1,370.00	985.00



^{*} ambient temperature approx. 20°C.

REMS Curvo 22 V – Mobile, handy, light.

Bending instead of expensive fittings! The cost of REMS Curvo 22 V is recovered just after a few bends. Without vice. Ready to use immediately without setting. Li-Ion 21.6 V, 5.0 Ah battery, for 90 stainless steel pipe bends of the Ø 22 mm press fitting systems with one battery charge*.



Info



only 8,5 kg
German quality product



REMS Curvo 22 V

Cordless tube bender Ø 10–40 mm, Ø ¼–1½", up to 180°. Hard, semi-hard, soft copper pipes, also thin-walled, Ø 10–28 mm, Ø ¼–1½", soft coated copper pipes, also thin-walled, Ø 10–18 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1 Ø ¾–1½", pipes of the press fitting systems of stainless steel Ø 12–28 mm, carbon steel, also coated, Ø 12–28 mm, soft precision steel pipes Ø 10–28 mm, steel pipes EN 10255 Ø ¼–¾", electrical installation pipes EN 50086 Ø 16–25 mm, composite tubes Ø 14–40 mm, etc. Drive unit with maintenance-free gear and safety slipping clutch, powerful 21.6 V battery motor, stepless electronic safety switch, right and left-hand rotation, insert bolt. Machine status check with overload protection, temperature monitoring, battery charging status check. Battery Li-Ion 21.6 V, 5.0 Ah, 230 V, 50–60 Hz, 90 W rapid charger. Bending formers and back formers¹. In sturdy steel case.

REMS Curvo 22 V	Art.-No.	£	Offer £
Basic-Pack	580014 R220	2,130.00	1,265.00

Machine support 3B

height adjustable, on tripod
Art.-No. 586100 R

£ 252.00

¹REMS Curvo/Curvo 22 V Sets are delivered with bending formers and back formers with the respectively smaller radius, see catalogue.

REMS Curvo 50 – Bending large pipes up to Ø 50 mm, 90°.



Info

REMS Curvo 50 Basic-Pack

Electric pipe and tube bender Ø 10–50 mm, up to 90°. Steel pipes EN 10255 Ø ¼–1½", stainless steel pipes EN ISO 1127, EN 10217-7, Ø ½–1½", s ≤ 2.6 mm, hard, semi-hard, soft copper pipes, Ø 10–42 mm, thin-walled copper pipes Ø 10–35 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1 Ø ¾–1½", pipes of the press fitting systems of stainless steel Ø 12–42 mm, carbon steel Ø 12–42 mm, coated carbon steel Ø 12–28 mm, composite tubes Ø 14–50 mm, etc. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation. Adaptor block 35–50, Support 35–50, insert bolt. In sturdy steel case.
Art.-No. 580110 R220 £ 3,590.00

£ 2,595.00

Bending formers and back formers

Bending formers and back formers, 180°, form and pressure resistant, in highstrength, high-slide, glass-fibre reinforced polyamide 90° (Ø 35 R 100, Ø 42 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140). Optimum mating of bending formers and back formers ensures sliding appropriate to the material without cracks and wrinkles. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers.



Info



List price **-20%**



Info

German quality product



REMS Sinus

Universal for many tubes. Easy bending through long lever arms. Selectable lever positioning ensures optimum bending position and power transmission. Only one type of bending and back formers for REMS Sinus and REMS Curvo.

REMS Sinus Basic-Pack

Hand tube bender Ø 10–32 mm, Ø ¾–1", up to 180°. Hard, half-hard, soft copper tubes, also thin-wall Ø 10–22 mm, Ø ¾–1", coated soft copper tubes, also thin-wall Ø 10–18 mm, pipes of the press fitting systems made of stainless steel, carbon steel (coated) Ø 12–18 mm, soft precision steel tubes Ø 10–22 mm, soft precision steel tubes, Ø 10–20 mm, electric conduit EN 50086, Ø 16–20 mm, multi-layer composite tubes Ø 14–32 mm and others. Drive unit, insert bolt. Bending and back formers not included. See list in table. REMS bending spray. In sturdy steel case.

Art.-No. 154010 R £ 483.00

£ **439.00**

Info



REMS SSM 160KS – compact and robust.

Heating element according to DVS. Electronic temperature control. High quality PTFE coating. Closed plane housing. With quick clamping device, also for angled outputs.

REMS SSM 160KS

Heating element butt welding machine for plastic tubes and mouldings made of PB, PE, PP, PVDF. PE Ø 40–90 mm SDR ≥ 6, PE Ø 40–110 mm SDR ≥ 9, PE Ø 40–125 mm SDR ≥ 11, PE Ø 40–140 mm SDR ≥ 17, PE Ø 40–160 mm SDR ≥ 21. Heating element butt welding device with PTFE-coated heating element 110 V, 50–60 Hz, 1200 W. Adjustable temperature 180–290°C, preset for PE tubes. Electronic temperature control. Protective cover for heating element. Electrical planing device 230 V, 50–60 Hz, 500 W. Pressing device. Quick clamping device, also for inclined outlets, consisting of 2 vices with 2 clamping inserts each Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. 2 pipe rests Ø 160 mm with pipe rest inserts Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm. Sheet steel base with installed drawer. Operating key. Closed sheet steel underframe = transport box.

Art.-No. 252046 R110G £ 6,590.00

£ **5,349.00**

REMS SSM 315RF – convenient for job site and workshop.

Heating element according to DVS. Electronic temperature control. High quality PTFE coating. Closed plane housing. With quick clamping device.



Info



REMS SSM 315RF

Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF. PE Ø 90–180 mm SDR ≥ 6, PE Ø 90–200 mm SDR ≥ 7.4, PE Ø 90–225 mm SDR ≥ 9, PE Ø 90–250 mm SDR ≥ 13.6, PE Ø 90–280 mm SDR ≥ 17, PE Ø 90–315 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V, 50–60 Hz, 3000 W. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Electric facing cutter unit 230 V, 50–60 Hz, 500 W. Pressing device. 2 quick clamping devices Ø 315 mm with 2 clamping inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. 2 pipe supports Ø 315 mm with pipe support inserts Ø 90, 110, 125, 160, 200, 250 mm. Ring spanner. Boxes for clamping and pipe rest inserts. Tubular stand on wheels.

Art.-No. 255020 R110G £ 15,290.00

£ **12,449.00**

REMS SSG – heating element according to DVS.

Electronic temperature control. High-quality PTFE coating.



Info



REMS SSG 180 EE

Butt welding unit for plastic pipes and fittings in PB, PE, PP, PVDF. PTFE-coated heating element 230 V, 50–60 Hz. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Support stand. In a carton.

Art.-No. 250220 R110G £ 800.00

£ **695.00**

REMS Secco – for drying and dehumidification.

Dehumidification rate ≤ 80 l / 24 h
Air volume ≤ 850 m³/h



Info 80



Info 50



Dehumidification rate ≤ 50 l / 24 h
Air volume ≤ 265 m³/h



Powerful, highly efficient air dehumidifier/building drier for drying rooms, e.g. after mains water damage, flooding, dehumidification of damp cellar rooms etc. and for fast drying of concrete, masonry, plaster and screed for example. For commercial use in trade and industry.

REMS Secco 80 Set

Electric air dehumidifier/building dryer for commercial use. For drying rooms, dehumidifying cellars etc. and drying concrete, masonry, plaster and screed. Chiller unit with rotation compressor and condensation motor 230 V, 50 Hz, 680 W, with automatic hot-gas thawing system, for continuous operation. Very quiet running. Dehumidification rate ≤ 80 l/24 h, air volume ≤ 850 m³/h. Electronic control unit with illuminated 3" display and memory function. Electronic hygrostat, operating hours counter, electricity meter. Air filter. In a sturdy sheet steel housing on a mobile tubular steel frame with large castors. In a carton.

Art.-No. 132010 R220 £ 2,240.00



Super offer!

You will get 1 REMS Detect W moisture measuring device free when you buy a REMS Secco 80 set. You have an additional saving of £ 241.00.

Art.-No. 132X01 R220 £ **1,835.00**

REMS Secco 50 Set

Electric air dehumidifier/building dryer for commercial use. For drying rooms, dehumidifying cellars etc. and drying concrete, masonry, plaster and screed. Chiller unit with rotation compressor and capacitor motor 230 V, 50 Hz, 760 W, with automatic thawing system, for continuous operation. Very quiet running. Dehumidification rate ≤ 50 l/24 h, air volume ≤ 265 m³/h. Electronic control unit with large, illuminated display and memory function. Electronic humidity switch. Air filter. Internal 7.7 l condensation tank. In sturdy plastic housing with casters. In a carton.

Art.-No. 132011 R220 £ 810.00

£ **655.00**

11.5 litre condensation tank

for discharge of condensation in the sheet steel housing.

Art.-No. 132100 R

£ **55.00**

Exhaust air set

consisting of exhaust air hose Ø200 mm, 10 m long, with metal fastening eyes for hanging up on site, with connecting flange, for distribution of the exhaust air in the room, for dehumidifying cavities, e.g. above intermediate ceilings and for additional blowing of wet surfaces.

Art.-No. 132104 R

£ **329.00**

REMS Detect W

dielectric moisture measuring device for non-destructive moisture measurement in building materials, e.g. concrete, masonry, plaster, wood

Art.-No. 132115 R

£ **241.00**

REMS Orkan – for aeration.



REMS Orkan 1360

Electric construction ventilator for commercial use. For aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms, for supporting the drying of, e.g., concrete, masonry, plaster and screed and for inflating bouncy castles, hot air balloons, for example. Capacitor motor 230 V, 50 Hz, 145 W, for continuous operation. Very quiet running. Air volume 1,360 m³/h. In a sturdy plastic housing. In a carton.

Art.-No. 132300 R220G £ 423.00



£ **310.00**



REMS Orkan 2050

Electric construction ventilator for commercial use. For aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms. Especially also for drying of, e.g., concrete, masonry, plaster and screed. Capacitor motor 230 V, 50 Hz, 355 / 450 W, for continuous operation. Very quiet running. Air volume 1,740/2,050 m³/h. In a sturdy plastic housing. In a carton.

Art.-No. 132301 R220G £ 446.00



For supporting electric dehumidifiers/construction driers.

£ **330.00**

REMS Mini-Press 22 V ACC and REMS Mini-Press S 22 V ACC – The real one-hand radial presses!
Universal up to Ø 40 mm. Ultra-light. Ultra-small. Ultra-handly. Ultra-fast. 360° rotatable.

Li-Ion 21.6 V, 2.5 Ah battery for approx. 390 pressings Viega Profipress DN 15 per battery charge*.



Patent EP 1 952 948
Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection.

Patent EP 2 347 862
Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing.

←ACC→
Automatic Circuit Control
with automatic retraction



REMS Mini-Press 22 V ACC Basic-Pack/
REMS Mini-Press S 22 V ACC Basic-Pack

Cordless radial press 22 kN with automatic circuit control, for producing pipe pressing joints Ø 10–40 mm, Ø ¾–1 ¼". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 70 W.



REMS Mini-Press 22 V ACC	Art.-No.	£	Promotion £
Basic-Pack In sturdy steel case.	578010 R220G	1,840.00	1,169.00
Basic-Pack In L-Boxx system case.	578014 R220G	1,890.00	1,199.00
Basic-Pack\IP Without battery, without rapid charger. In sturdy steel case.	578004 R22	1,350.00	1,015.00
Basic-Pack\IP Without battery, without rapid charger. In L-Boxx system case.	578005 R22	1,390.00	1,035.00

REMS Mini-Press S 22 V ACC	Art.-No.	£	Promotion £
Basic-Pack In sturdy steel case.	578015 R220G	1,840.00	1,169.00
Basic-Pack In L-Boxx system case.	578016 R220G	1,890.00	1,199.00
Basic-Pack\IP Without battery, without rapid charger. In sturdy steel case.	578006 R22	1,350.00	1,015.00
Basic-Pack\IP Without battery, without rapid charger. In L-Boxx system case.	578007 R22	1,390.00	1,035.00

* ambient temperature approx. 20°C.

¹⁾ Warranty conditions and registration for extension of the manufacturer's warranty to 5 years under www.rems.de/service



Automatic Circuit Control
with automatic retraction

German quality product

REMS TECHNOLOGY
Li-ION PLUS



only 2.4 kg

LED work light



Info



Only 2.4 kg! Universal up to Ø 40 mm.
Ultra-light. Ultra-small. Ultra-handly.
Ultra-fast. 360° rotatable.

REMS Mini-Press 14 V ACC Basic-Pack

Cordless radial press 22 kN with automatic circuit control for producing pipe pressing joints Ø 10–40 mm, Ø ¾–1 ¼". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 1.5 Ah, rapid charger 220–240 V, 50–60 Hz, 10.8–18 V, 65 W. In sturdy steel case. Art.-No. 578012 R220 £ 1,560.00

£ **1,035.00**

FREE



+ gift package with a value of £ 166.00
extra battery Li-Ion 14.4 V, 1.5 Ah



Automatic Circuit Control
with automatic retraction

German quality product

REMS TECHNOLOGY
Li-ION PLUS



only 4.3 kg

LED work light



Info



Universal up to Ø 54 mm. Compact.
Handy. Ultra-fast. 360° rotatable.

REMS Akku-Press 14 V Basic-Pack

Cordless radial press 32 kN with switch-off signal for producing pipe pressing joints Ø 10–108 (110) mm, Ø ¾–4". Battery Li-Ion 14.4 V, 5.0 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 10.8–18 V, 65 W. In sturdy steel case. Art.-No. 571013 R220 £ 1,560.00

£ **1,215.00**

REMS Akku-Press 14 V ACC Basic-Pack

Cordless radial press 32 kN with automatic circuit control for producing pipe pressing joints Ø 10–108 (110) mm, Ø ¾–4". See above for rest of delivery scope. Art.-No. 571014 R220 £ 1,760.00

£ **1,235.00**

FREE



+ Gift package with every Basic-Pack:
extra Li-Ion 14.4 V, 5.0 Ah battery
Value £ 235.00

Universal up to Ø 54 mm. Compact.
Handy. Ultra-fast. 360° rotatable.



Automatic Circuit Control
with automatic retraction

German quality product



only 4.7 kg



Info



REMS Power-Press ACC Basic-Pack

Electro-hydraulic radial press 32 kN with automatic retraction for producing pressing joints Ø 10–108 (110) mm, Ø ¾–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing chains. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. In sturdy steel case. Art.-No. 577010 R220 £ 1,510.00

£ **1,235.00**

REMS Power-Press SE – universal
up to Ø 54 mm. Reliable pressing
in seconds.



Info

German quality product



only 4.7 kg



REMS Power-Press SE Basic-Pack

Electric radial press 32 kN for producing pressing joints Ø 10–108 (110) mm, Ø ¾–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-mechanical drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle, overload protection, safety tip switch. In sturdy steel case. Art.-No. 572111 R220 £ 1,000.00

£ **899.00**



Automatic Circuit Control

with automatic retraction

German quality product



REMS Power-Press XL ACC – universal up to Ø 110 mm.

Also for Geberit Mapress c-steel, stainless steel, copper in drinking water and heating installation up to Ø 108 mm.

Pressing of Ø 10 – 108 mm in just one action.

Ultra-fast, e.g. Geberit Mapress stainless steel Ø 108 mm in only 15 seconds.

For driving REMS pressing tongs/pressing rings/XL pressing rings and other suitable makes of pressing tongs/pressing rings.

Rotating pressing tongs seat with automatic locking.



Info

REMS Power-Press XL ACC Basic-Pack

Electro-hydraulic radial press 32 kN with automatic retraction for producing pressing joints Ø 10–108 (110) mm, Ø ½–4". For driving REMS pressing tongs/pressing rings/pressing rings XL and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. In XL-Boxx system case. Art.-No. 579012 R110G

£ **2,420.⁰⁰**



Automatic Circuit Control

with automatic retraction



* ambient temperature approx. 20°C.

Pressing of Ø 64 – 108 mm in a single action. Anti-vibration system.

Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. With automatic circuit control. Secure seating of adapter tongs by automatic locking. Li-Ion 21.6 V, 5.0 Ah battery, for approx. 150 pressings Geberit Mapress stainless steel Ø 108.0 mm with one battery charge*.



Info



REMS Akku-Press XL 45 kN 22 V ACC Basic-Pack Z7

Cordless radial press 45 kN with automatic circuit control for making press joints XL Ø 64–108 mm, Ø 2½–4". For driving REMS pressing rings XL. Swivelling pressing ring seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 5.0 Ah, rapid charger 100–240 V, 50–60 Hz, 90 W. Adapter tongs Z7 XL 45 kN. In XL-Boxx system case.

Art.-No. 579014 R220G £ 3,290.00

£ **2,499.⁰⁰**

German quality product



only 1,6 kg

REMS Eco-Press – universal up to Ø 26 mm. Secure crimping in seconds.



Info

REMS Eco-Press drive unit


Manual radial press with final-lock-positioning for producing pressing joints of plastic and multi-layer composite tubes Ø 10 – 26 mm, Ø ¾ – 1". For operating with REMS pressing tongs/pressing rings. With dividable tubular arms. In skin package.

Art.-No. 574000 R £ 235.00

£ **179.⁰⁰**

**REMS Akku-Press E 22 V ACC and
REMS Akku-Press 22 V ACC –
Universal up to Ø 54 mm. Compact.
Handy. Ultra-fast. 360° rotatable.**

Automatic circuit control. Anti-vibration system. Automatic locking of the pressing tongs. Li-Ion 21.6 V, 2.5 Ah battery for approx. 200 pressings Viega Profipress DN 15 per battery charge*.

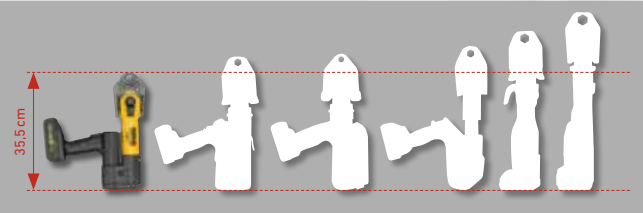

The little one amongst the big.



with automatic retraction
German quality product



only 3,3kg

LED work light

**REMS Akku-Press E 22 V ACC Basic-Pack/
REMS Akku-Press 22 V ACC Basic-Pack**

Cordless radial press 32kN with automatic circuit control, for making press joints Ø 10 – 108 (110) mm, Ø 3/4"–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah.



FREE

**Extra battery Li-Ion 21.6 V, 2.5 Ah
(not supplied with Basic-Pack\P)**
Art.-No. 571571 R22 £ 267.00



NEW

REMS Akku-Press E 22 V ACC

REMS Akku-Press E 22 V ACC Basic-Pack

Rapid charger 100 – 240 V, 50 – 60 Hz, 70 W.
In sturdy steel case.

Art.-No. 576016 R220G £ 1,870.00

£ **1,255.00**

REMS Akku-Press E 22 V ACC Basic-Pack

Rapid charger 100 – 240 V, 50 – 60 Hz, 70 W.
In L-Boxx system case.

Art.-No. 576017 R220G £ 1,910.00

£ **1,285.00**

REMS Akku-Press E 22 V ACC Basic-Pack\P

Without battery, without rapid charger.
In sturdy steel case.

Art.-No. 576018 R22 £ 1,410.00

£ **1,130.00**

REMS Akku-Press E 22 V ACC Basic-Pack\P

Without battery, without rapid charger.
In L-Boxx system case.

Art.-No. 576019 R22 £ 1,450.00

£ **1,160.00**



REMS Akku-Press 22 V ACC

REMS Akku-Press 22 V ACC Basic-Pack

With pressure monitoring and result display. .
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W.

In sturdy steel case.
Art.-No. 576010 R220G £ 2,190.00

£ **1,319.00**

REMS Akku-Press 22 V ACC Basic-Pack

With pressure monitoring and result display. .
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W.

In L-Boxx system case.
Art.-No. 576011 R220G £ 2,230.00

£ **1,349.00**

REMS Akku-Press 22 V ACC Basic-Pack\P

With pressure monitoring and result display. .
Without battery, without rapid charger.

In sturdy steel case.
Art.-No. 576001 R22 £ 1,710.00

£ **1,225.00**

REMS Akku-Press 22 V ACC Basic-Pack\P

With pressure monitoring and result display. .
Without battery, without rapid charger.

In L-Boxx system case.
Art.-No. 576002 R22 £ 1,750.00

£ **1,255.00**

* ambient temperature approx. 20°C.

£ excl. VAT. Promotion until 31st July 2024. We reserve the right to increase prices.

CONNECTED

REMS Akku-Press 22 V Connected – universal up to Ø 54 mm. With Connected functionality via Wi-Fi radio standard and OLED display.


Selectable ACC drive mode. Pressure monitoring and result display. Anti-vibration system. Automatic locking of pressing tongs. Electrically monitored closing position of the tong retaining bolt. Secure crimping in seconds. Voice recordings with voice recognition. Creating reports with texts and pictures. Geolocalisation of the pressing sites. Li-Ion 21.6 V, 2.5 Ah battery for approx. 210 pressings Viega Profipress DN 15 with one battery charge*.



Pressure monitoring ...
The pressing pressure is constantly monitored during the pressing process. The pressure-time diagram of the compression can be shown directly on the OLED display.




... and result display
If the baling pressure was within the specification, a "laughing smiley face" is shown on the OLED display.



Logs with your own company logo
All measurement/press data are logged. The user can access this data via the REMS Service Portal, upload images of pressings and create logs with text and images.



Geolocation
Automatic determination of the press locations and visualization on the map.

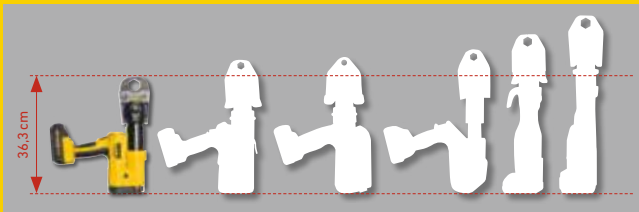

The little one amongst the big.



Voice recording with voice recognition
A voice recording can be made for each pressing. Via "Speech-to-Text" (speech recognition) a voice recording can be converted into editable text.



REMS Akku-Press 22 V Connected Basic-Pack

Cordless radial press 32 kN with selectable ACC drive mode, with Connected functionality via Wi-Fi radio standard and OLED display, pressure monitoring and result display, for making press joints Ø 10–108 (110) mm, Ø ⅜–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electrically monitored closing position of the tong retaining bolt. Electro-hydraulic drive with powerful, brushless, maintenance free 21.6 V, 400 W battery motor, robust planetary gear, eccentric piston pump and compact high-performance hydraulic system. Anti-vibration system. Safety tip switch. LED work lights. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 100–240 V, 50–60 Hz, 90 W.

REMS Akku-Press 22 V Connected Basic-Pack

In sturdy steel case.
Art.-No. 576014 R220G £ 3,260.00

£ **2,229.00**

REMS Akku-Press 22 V Connected Basic-Pack

In L-Boxx system case.
Art.-No. 576015 R220G £ 3,300.00

£ **2,259.00**



REMS Akku-Press 22 V Connected Basic-Pack\P

Without battery, without rapid charger.
In sturdy steel case.
Art.-No. 576004 R22 £ 2,780.00

£ **1,899.00**

REMS Akku-Press 22 V Connected Basic-Pack\P

Without battery, without rapid charger.
In L-Boxx system case.
Art.-No. 576005 R22 £ 2,820.00

£ **1,929.00**

* ambient temperature approx. 20°C. Wi-Fi disabled. LED work lights off.

¹⁾ Warranty conditions and registration for extension of the manufacturer's warranty to 5 years under www.rems.de/service



REMS pressing tongs/pressing rings VMP ¾–2" for Viega Megapress/Megapress S

Can be driven by all REMS radial presses with 32 kN thrust force and suitable radial presses of other makes. Not for gas installations.

German quality product



Info



Z5

Pressing contour	Art.-No.	£
VMP ¾" (OD 17,2 mm)	571740	222.00
VMP ½" (OD 21,3 mm)	571762	222.00
VMPz ¾" (OD 26,9 mm)	571764	222.00
VMPz 1" (OD 33,7 mm)	571767	222.00
VMPz 1¼" (S) (OD 42,4 mm)	572413	730.00
VMPz 1½" (PR-3B) ¹⁾ (OD 48,3 mm)	572844 R	494.00
VMPz 2" (PR-3B) ¹⁾ (OD 60,3 mm)	572845 R	494.00

Z5 adapter tongs

for driving the REMS pressing rings
VMPz 1½–2" (PR-3B)

Art.-No. 572802 RX

£ 320.00

¹⁾ The Z5 adapter tongs are required for driving the pressing rings (PR-3B).

REMS pressing rings VMP 2½–4" for Viega Megapress S XL

Can be driven by REMS Akku-Press XL 45 kN 22 V ACC with 45 kN thrust force. Z7 XL 45 kN adapter tongs required. Not for gas installations.

German quality product



Info



Z7 XL 45 kN

Pressing contour	Art.-No.	£
VMPz 2½" XL (PR-3B) (OD 66,7 mm)	579112 R	630.00
VMPz 3" XL (PR-3B) (OD 79,4 mm)	579113 R	630.00
VMPz 4" XL (PR-3B) (OD 104,8 mm)	579114 R	670.00

Z7 XL 45 kN adapter tongs

for driving the REMS pressing rings
VMPz 2½–4" XL (PR-3B)

Art.-No. 579123 R

£ 407.00




VMPz pressing ring with teeth
Patent EP 2 027 971

REMS pressing tongs – Proven a million times over.
For all common press fitting systems.

Highly durable pressing tongs/pressing tongs Mini made of forged, tenacious, specially hardened special steel. The pressing contours of the REMS pressing tongs are system-specific and correspond to the pressing contours of the respective press fitting systems. Perfect system-conformant, reliable pressing as a result. Pressing jaws of the pressing tongs with high-precision cut and exactly rounded pressing contour on CNC machining centres. Much lower production tolerances than only cast pressing contour as a result.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing tongs Mini/pressing rings with pressing contour M, V, SA, B, HR and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.



With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Example REMS pressing tongs M: Impression "M" on pressed fitting for traceability according to EN 1775:2007



All the REMS pressing tongs marked by * in the catalogue have another connection and also fit the REMS Eco-Press manual radial press. Thus simple, inexpensive stocking.

Patent EP 2 027 971

REMS Mini ACz, Fz, RFz, RFlz, VMPz pressing tongs with teeth prevent formation of burr on the pressing sleeve.



German quality product

REMS pressing tongs /
pressing tongs Mini
M, V up to 35 mm

£ 99.00

REMS pressing tongs /
pressing tongs Mini up to 32 mm.
F, TH, U, UP, VP, G, B

£ 105.00

REMS pressing tongs Mini Set
M 15+22+28+35

In L-Boxx system case.
Art.-No. 578057 R £ 790.00

£ 495.00

V 15+22+28+35

In L-Boxx system case.
Art.-No. 578058 R £ 790.00

£ 495.00

REMS pressing tongs Set
M 15+22+28+35

In L-Boxx system case.
Art.-No. 571163 R £ 790.00

£ 495.00

V 15+22+28+35

In L-Boxx system case.
Art.-No. 571164 R £ 790.00

£ 495.00



More pressing tongs Mini
+ pressing tongs Mini Sets




More pressing tongs
+ pressing tongs Sets

REMS pressing tongs / pressing tongs Mini BMP ¼" – 1½" for refrigeration and air-conditioning technology.

REMS pressing tongs Mini BMP for the press fitting system
Conex Bänninger >B< MaxiPro

Pressing contour	Art.-No.	£
BMP ¼"	578700	181.00
BMP ¾"	578702	181.00
BMP ½"	578704	181.00
BMP ¾"	578706	181.00
BMP ¾"	578708	181.00
BMP ¾"	578710	181.00
BMP 1"	578712	181.00
BMP 1½"	578714	181.00



Patent EP 1 952 948
Patent EP 2 347 862

REMS pressing tongs Mini Set BMP ¼ + ¾ + ½ + 5/8"

In L-Boxx system case.
Art.-No. 578090 R £ 880.00

£ 539.00

REMS pressing tongs Mini Set BMP ¼ + ¾ + ½ + 5/8 + ¾ + 7/8 + 1 + 1½"

In L-Boxx system case.
Art.-No. 578091 R £ 1,600.00

£ 999.00

REMS pressing tongs BMP for the press fitting system Conex Bänninger >B< MaxiPro

Pressing contour	Art.-No.	£
BMP ¼"	571700 R	191.00
BMP ¾"	571702 R	191.00
BMP ½"	571704 R	191.00
BMP ¾"	571706 R	191.00
BMP ¾"	571708 R	191.00
BMP ¾"	571710 R	191.00
BMP 1"	571712 R	191.00
BMP 1½"	571714 R	191.00



REMS pressing tongs Set BMP ¼ + ¾ + ½ + 5/8"

In L-Boxx system case.
Art.-No. 571184 R £ 920.00

£ 539.00

REMS pressing tongs Set BMP ¼ + ¾ + ½ + 5/8 + ¾ + 7/8 + 1 + 1½"

In L-Boxx system case.
Art.-No. 571185 R £ 1,680.00

£ 999.00

REMS pressing rings S (PR-2B) –
multi-angle pressing rings, ideal for
areas with difficult access.



e.g. opened walls, exposed pipes, shafts



German quality product



REMS pressing rings S (PR-2B)

Pressing contour	Art.-No.
M 12 S (PR-2B)	574736 R
M 15 S (PR-2B)	574738 R
M 18 S (PR-2B)	574740 R
M 22 S (PR-2B)	574742 R
M 28 S (PR-2B)	574744 R
M 35 S (PR-2B)	574746 R
F 16 S (PR-2B)*	574728 R
F 20 S (PR-2B)*	574730 R
F 26 S (PR-2B)*	574732 R
F 32 S (PR-2B)*	574734 R
TH 10 S (PR-2B)*	574772 R
TH 11,6 S (PR-2B)*	574774 R
TH 12 S (PR-2B)*	574776 R
TH 14 S (PR-2B)*	574778 R
TH 15 S (PR-2B)*	574780 R
TH 16 S (PR-2B)*	574782 R
TH 17 S (PR-2B)*	574784 R
TH 18 S (PR-2B)*	574786 R
TH 20 S (PR-2B)*	574788 R
TH 22 S (PR-2B)*	574790 R
TH 25 S (PR-2B)*	574792 R
TH 26 S (PR-2B)*	574794 R
TH 28 S (PR-2B)	574796 R
TH 32 S (PR-2B)	574798 R
V 12 S (PR-2B)	574748 R
V 14 S (PR-2B)	574800 R
VG 14 S (PR-2B)	574750 R

Pressing contour	Art.-No.
V 15 S (PR-2B)	574752 R
V 16 S (PR-2B)	574802 R
VG 16 S (PR-2B)	574754 R
V 18 S (PR-2B)	574756 R
V 22 S (PR-2B)	574758 R
V 28 S (PR-2B)	574760 R
V 35 S (PR-2B)	574762 R
BMP 6 S (PR-2B)	574710 R
BMP 8 S (PR-2B)	574712 R
BMP 10 S (PR-2B)	574714 R
BMP 12 S (PR-2B)	574716 R
BMP 15 S (PR-2B)	574718 R
BMP 16 S (PR-2B)	574720 R
BMP 18 S (PR-2B)	574722 R
BMP 22 S (PR-2B)	574724 R
BMP 28 S (PR-2B)	574726 R
BMP ¼" S (PR-2B)	574810 R
BMP ¾" S (PR-2B)	574812 R
BMP ½" S (PR-2B)	574814 R
BMP ¾" S (PR-2B)	574816 R
BMP ¾" S (PR-2B)	574818 R
BMP 7/8" S (PR-2B)	574820 R
BMP 1" S (PR-2B)	574822 R
BMP 1 1/8" S (PR-2B)	574824 R

REMS pressing rings S (PR-2B)
M, F, TH, V, VG, BMP 12 – 28 mm

£ 129.00

REMS pressing rings S (PR-2B)
M, F, TH, V, VG, BMP 32 – 35 mm

£ 142.00

REMS Mini adapter tong Z8

for driving REMS pressing rings S (PR-2B).
Suitable for all REMS radial presses 22 kN.
Art.-No. 574700 R

£ 149.00

REMS adapter tong Z8

for driving REMS pressing rings S (PR-2B).
Suitable for all REMS radial presses 32 kN
and suitable radial presses from other makes with a thrust of 32 kN.
Art.-No. 574702 R

£ 149.00

Steel case

with insert for adapter tongs Mini Z8 and adapter tongs Z8 and 6 REMS pressing rings
V 12 – 35 S (PR-2B) or M 12 – 35 S (PR-2B) or F 16 – 32 S (PR-2B).
Art.-No. 574516 R

£ 99.50

* Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs.

e.g. pressing contour for press fitting systems Geberit
Mapress CARBON STEEL, STAINLESS STEEL, STAINLESS
STEEL gas, COPPER, COPPER gas.

Pressing up to Ø 108 mm in just one action.



REMS XL pressing rings up to Ø 108 mm (PR-3S)

Heavy duty XL pressing rings XL (PR-3S) and Z6 XL or Z7 XL adapter tongs made of forged and specially hardened special steel. The pressing contours of the REMS XL pressing rings (PR-3S) are system-specific and correspond to the pressing contours of the respective press fitting systems. Perfect system-conformant, reliable pressing as a result.

Pressing contour	Art.-No.	£
M 66,7 XL (PR-3S) ^{3) 7)}	579107 R	1,200.00
M 76,1 XL (PR-3S) ^{3) 7)}	579101 R	1,200.00
M 88,9 G XL (PR-3S) ^{3) 7)}	579110 R	1,400.00
M 108,0 G XL (PR-3S) ^{3) 7)}	579111 R	1,400.00
XP 64,0 XL (PR-3S) ^{3) 7)}	579100 R	1,090.00
XP 66,7 XL (PR-3S) ^{3) 7)}	579108 R	1,200.00
XP 108,0 XL (PR-3S) ^{3) 7)}	579109 R	1,400.00

Z6 XL adapter tongs

For driving the REMS pressing rings XL 64.0–108.0 (PR-3S) with REMS Power-Press XL.
Art.-No. 579120 R

£ 385.00

Z7 XL 45 kN adapter tongs

For driving the REMS pressing rings XL 64.0–108.0 (PR-3S) with REMS Akku-Press XL 45 kN 22 V ACC.
Art.-No. 579123 R

£ 407.00

³⁾ The Z6 XL or Z7 XL pressing tongs are required for driving the XL pressing rings (PR-3S).
⁷⁾ Driven by REMS Power-Press XL, REMS Akku-Press XL 45 kN 22 V ACC.



German quality product


REMS pressing rings for large dimensions up to Ø 54 mm. Fit. Press. Finished.



REMS pressing rings (PR-3S) with 3 swivellable pressing formers mounted on a jointed ring for large dimension complex pressings. Optimum pressing by radially controlled movement of the pressing formers. Pressing contour M for Pegler Yorkshire Xpress, Geberit Mapress and other suitable systems.

REMS pressing ring M42 (PR-3S)	Art.-No. 572706 R	£ 700.00
REMS pressing ring M54 (PR-3S)	Art.-No. 572708 R	£ 700.00
Intermediate tongs Z2 for driving REMS pressing rings (PR-3S) 42–54 mm	Art.-No. 572795 R	£ 149.00
Steel case	Art.-No. 572810 R	£ 99.50
Pressing ring set complete	Art.-No. 572060 R	£ 1,640.00

£ 1,225.00

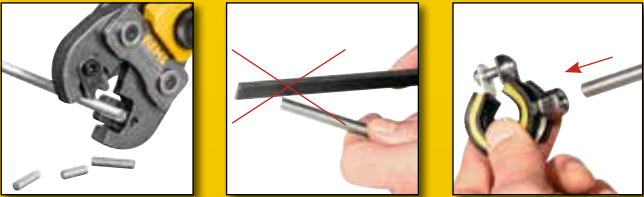

Cropping tongs with 1 pair of reversible cutting inserts for steel, stainless steel, M 6–M 12, up to strength class 4.8 (400 N/mm²).



German quality product
Patent EP 1 952 948
Patent EP 2 347 862

REMS cropping tongs M – cutting threaded bars. Ultra-fast.



All cropping tongs marked by * have another connection for manual drive by the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

For REMS Mini-Press 14 V ACC, REMS Mini-Press 22 V ACC, REMS Mini-Press S 22 V ACC:
REMS Mini cropping tongs – cuts in just 2 seconds!

M 6	Art.-No. 578620	
M 8	Art.-No. 578621	
M 10	Art.-No. 578622	instead of £ 250.00 now only

For REMS radial presses (except REMS Mini-Press 14 V ACC, REMS Mini-Press 22 V ACC, REMS Mini-Press S 22 V ACC) and suitable radial presses of other makes:

REMS cropping tongs	
M 6*	Art.-No. 571890
M 8*	Art.-No. 571895
M 10	Art.-No. 571865
M 12	Art.-No. 571870
	instead of £ 250.00 now only

£ 175.00



Info

German quality product



Info



W1.303



7808-649

REMS Spezial – high alloy thread cutting oil

Mineral oil-based, can be washed out with water.

REMS Spezial canister 5 l

Art.-No. 140100 R £ 77.00

£ **53.50**

REMS Spezial spray 600 ml

Art.-No. 140105 R £ 24.10

£ **16.60**

REMS Sanitol – mineral oil-free thread cutting oil.

Completely soluble in water. Mineral oil-free, ethanol-free. Dyed red for wash-out check. Excellent corrosion protection.

REMS Sanitol canister 5 l

Art.-No. 140110 R £ 180.00

£ **119.00**

REMS Sanitol spray 600 ml

Art.-No. 140115 R £ 35.00

£ **26.00**

REMS eva – the die stock for professionals.

Very easy starting and thread cutting by precision processing of the die head, dies and cover in a compact unit. Ratchet lever of steel, thick plastic jacket.



Info



German quality product

REMS eva Set R 1/2+3/4+1+1 1/4

Manual die stock with quick-change die heads. For pipe threads 1/8–2", 16–50 mm, bolt threads 6–30 mm, 1/4–1". For right and left-hand threads. 1 ratchet lever for the entire cutting range. Quick-change die heads R 1/2–3/4–1–1 1/4 with dies for conical pipe threads ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand. In sturdy steel case.

Art.-No. 520015 £ 510.00

£ **405.00**

REMS eva Set R 1/2+3/4+1+1 1/4+1 1/2+2

Manual die stock with quick-change die heads R 1/2–3/4–1–1 1/4–1 1/2–2. In sturdy steel case.

Art.-No. 520017 £ 710.00

£ **515.00**

REMS Amigo E – ideal for conduit threading.



950 W
only 3.4 kg



Info



REMS Amigo E Set M 20-25-32

Electric die stock with quick-change die heads. For pipe threads 1/8–1", 16–32 mm, for right and left-hand threads. Drive machine with maintenance-free gear, powerful 110 V, 50–60 Hz, 950 W universal motor, safety switch, power boosting automatic carbon brush adjustment in the direction of rotation selection. Peak consumption up to 1500 W. Right and left-hand rotation. Support bracket for both directions of rotation. REMS eva quick-change die heads for threads for electrical installation pipes DIN EN 60423 M. In sturdy steel case.

Art.-No. 530014 R110G £ 1,010.00

£ **549.00**

German quality product

REMS Amigo / REMS Amigo 2 / REMS Amigo 22 V – Electric die stock with quick-change die heads.



REMS Amigo
1200 W – Only 3,5 kg



Info

German quality product



REMS Amigo 2
1700 W – Only 6,5 kg



Info



REMS Amigo 22 V
500 W – Only 5,6 kg



Info



Description	REMS eva quick-change die heads	Art.-No.	£	REMS Amigo 2 Set + REMS Aquila 3B Value £ 2,350.00	Offer £
REMS Amigo Set M 16-20-25-32 In sturdy steel case.	For threads for electrical installation pipes DIN EN 60423 M.	530022 R220	1,200.00		699.00
REMS Amigo 2 Set R ½ + ¾ + 1 + 1¼ + 1½ + 2 In sturdy steel case.	For pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand.	540020 R220	1,800.00		1,115.00
REMS Amigo 2 Set R ½ + ¾ + 1 + 1¼ + 1½ + 2 In sturdy steel case.	For pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand.	540020 R220	1,800.00	540X01 R220	1,449.00
REMS Amigo 22 V Set R ½ + ¾ + 1 In sturdy steel case.	For pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand.	530015 R220G	1,980.00		1,275.00
REMS Amigo 22 V Set M 20-25-32 In sturdy steel case.	For threads for electrical installation pipes DIN EN 60423 M.	530016 R220G	2,060.00		1,275.00
REMS Amigo 22 V Set LP R ½ + ¾ + 1 Same as Art.-No. 530015 Without battery, without rapid charger. In sturdy steel case.	For pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand.	530017 R22	1,500.00		1,075.00



German quality product



Info

REMS Tornado – a class on its own.

Automatic clamping chuck
Universal automatic die head
Automatic lubrication cooling

REMS Tornado 2000

Threading machine for pipe threads (1/16) ½ – 2", 16 – 63 mm, bolt threads (6) 10 – 60 mm, ¼ – 2". With maintenance-free gear, safety foot switch with emergency stop, 2 automatic clamping chucks, automatic lubrication cooling. With tool set, consisting of a universal automatic die head for all threads, including long threads, automatically opening, with automatic thread length for conical threads, dies for conical pipe thread, ISO 7-1, EN 10226 (DIN 2999, BSPT) R ½ – ¾ and R 1 – 2 right, pipe cutter, pipe inside burr remover, pressing lever. Height-adjustable material shelf. 110 V, 50 – 60 Hz, 1700 W universal motor. 53 rpm. Portable version on tripod, with large, removable oil basin and chip tray.

Art.-No. 340200 R220

£ 4,810.00

+ 1 REMS Spezial oil 5 l

Art.-No. 140100 R

£ 77.00

£ 4,887.00

£ 2,809.00

REMS Magnum – Threading machine

REMS Magnum 2000 L-T



Info

Wheel stand (Accessory)

Collapsible wheel stand (Accessory)

REMS Magnum 3000 L-T



Info

Wheel stand (Accessory)

REMS Magnum 4000 L-T



Info

Description	Art.-No.	£	Offer £
REMS Magnum 2000 L-T For workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton.	340226 R110G	+ REMS wheel stand + 1 REMS Spezial oil 5 l Art.-No. 344100 R Art.-No. 140100 R £ 510.00 £ 77.00	£ 5,447.00 3,115.00
REMS Magnum 3000 L-T For workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton.	380309 R110	+ REMS wheel stand + 1 REMS Spezial oil 5 l Art.-No. 344100 R Art.-No. 140100 R £ 510.00 £ 77.00	£ 7,727.00 4,389.00
REMS Magnum 4000 L-T For workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton.	380444 R110	+ REMS wheel stand + 1 REMS Spezial oil 5 l Art.-No. 344100 R Art.-No. 140100 R £ 510.00 £ 77.00	£ 8,587.00 5,459.00



German quality product

Wheel stand (Accessory)



Info

REMS Herkules 3B (Accessory)

REMS Collum – Electric roll groover up to 12".

REMS Collum

Roll grooving machine for grooving pipes for pipe coupling systems DN 25–300, 1–12". Roll grooving attachment, manual hydraulic pump, integrated, graduated ring gauge for automatic groove depth stop, 1 pair of grooving rollers (pressure roller, counterpressure roller) 2–6", Allen key. Choice of 3 drive units, with maintenance-free gear, powerful universal motor, safety switch. For workbench, stand or wheel stand. In a carton.

REMS Collum

Universal motor 230 V, 50–60 Hz, 1200 W, overload protection. 29 min⁻¹.
Art. No. 347006 R220 £ 2,850.00

£ **2,575.00**

REMS Collum 2

Universal motor 230 V, 50–60 Hz, 1700 W. 28 min⁻¹
Art. No. 347008 R220 £ 3,190.00

£ **2,899.00**

REMS Collum 2 Compact

Universal motor 230 V, 50–60 Hz, 1200 W, overload protection. 26 min⁻¹
Art. No. 347009 R220 £ 3,190.00

£ **2,899.00**

REMS roller groove device

Art. No. 347000 R £ 2,310.00

£ **1,989.00**

Stand

Wheel stand

REMS Herkules 3B

Material support, height adjustable, for pipes DN 25–150, Ø 1–6"

Art. No. 849315 R

£ 224.00

Art. No. 849310 R

£ 363.00

Art. No. 120120 R

£ 345.00

Accessory Pack 1

consisting of stand and REMS Herkules 3B
Art.-No. 120X01 R £ 570.00

£ **420.00**

Accessory Pack 4

consisting of wheel stand and REMS Herkules 3B
Art.-No. 120X04 R £ 710.00

£ **503.00**



Wheel stand (Accessory)



Info

REMS Herkules 3B (Accessory)

German quality product

REMS Collum 22 V – Electric roll groover up to 12". Mobile, fast, economical.

Li-Ion 21.6V, 9.0Ah battery, for approx. 23 DN 100/4" grooves with one battery charge.

REMS Collum 22 V

Cordless roll groove machine for grooving pipes for DN 25–300, 1–12" pipe coupling systems. Roll grooving attachment, manual hydraulic pump, integrated, graduated ring gauge for automatic groove depth stop, 1 pair of grooving rollers (pressure roller, counterpressure roller) 2–6", Allen key. Drive unit with maintenance-free gear, powerful battery motor 21.6V, 500 W. Safety switch. Right and left-hand rotation, machine status check with overload protection, temperature monitoring, battery charging status check. Li-Ion 21.6V, 9.0Ah battery, 100–240 V, 50–60 Hz, 90 W rapid charger. Support bracket for both directions. For workbench, stand or wheel stand. In a carton.
Art. No. 347005 R220G £ 3,850.00

£ **3,115.00**

Accessory Pack 1

consisting of stand and REMS Herkules 3B
Art.-No. 120X01 R £ 570.00

£ **420.00**

Accessory Pack 4

consisting of wheel stand and REMS Herkules 3B
Art.-No. 120X04 R £ 710.00

£ **503.00**

Stand

Wheel stand

REMS Herkules 3B

Material support, height adjustable, for pipes DN 25–150, Ø 1–6"

Art. No. 849315 R

£ 224.00

Art. No. 849310 R

£ 363.00

Art. No. 120120 R

£ 345.00

REMS Krokodil – chasing instead of chiselling.

Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamond cutting discs, dust-free, safe working and easy, even feed.



German quality product

REMS Krokodil 180 SR Basic-Pack

Electric diamond chasing and cutting grinder with speed regulation. For chasing and cutting, e.g. concrete, steel-reinforced concrete, masonry of all kinds, natural stone, screeds of all kinds. Chase depth ≤ 61 mm, continuously adjustable. Chasing width ≤ 62 mm, stepped with spacer discs 3, 6, 10, 20 mm. Drive machine with drive shaft Ø 22.2 mm, for 1, 2 or 3 diamond cutting discs in accordance with EN 13236, ≤ Ø 180 mm, with maintenance-free gear, 110 V, 50–60 Hz, 2,000 W universal motor. Multifunction electronics with soft start, idling speed limiting, overload protection. Overheating protection. Connecting cable 5.7 m. Restart protection in case of mains failure. Safety switch with lock. Load speed 3,300 rpm. Suction nozzle for connecting a vacuum cleaner/dust extractor (e.g. REMS Pull 2 M). Pin wrench size 13. In sturdy steel case. Art.-No. 185011 R220 £ 1,280.00



+ gift package with a value £ 193.40*
2 REMS universal diamond cutting disc LS
H-P Ø 180 mm

Art.-No. 185X03 R220 £ 1,035.00



REMS Krokodil 125 Basic-Pack

Electric diamond chasing and cutting grinder for chasing and cutting, e.g. concrete, steel-reinforced concrete, masonry of all kinds, natural stone, screeds of all kinds. Chase depth ≤ 38 mm, continuously adjustable. Chasing width ≤ 43 mm, stepped with spacer discs 3, 6, 10, 20 mm. Drive machine with drive shaft Ø 22.2 mm, for 1 or 2 diamond cutting discs in accordance with EN 13236, ≤ Ø 125 mm, with maintenance-free gear with safety slip clutch, 110 V, 50–60 Hz, 1,850 W universal motor. Multifunction electronics with soft start, idling speed limiting, overload protection. Connecting cable 2.3 m. Safety switch with lock. Load speed 5,000 rpm. Suction nozzle for connecting a vacuum cleaner/dust extractor (e.g. REMS Pull 2 M). Pin wrench size 13. In sturdy steel case. Art.-No. 185010 R220 £ 1,020.00



+ gift package with a value £ 67.60*
2 REMS universal diamond cutting disc
LS-Turbo Ø 125 mm

Art.-No. 185X02 R220 £ 889.00

REMS Pull 2 – for dry and wet suction.

Constantly high suction performance by permanent automatic filter cleaning. Certified for collecting health hazardous dusts in accordance with EN 60335-2-69¹⁾.



Water suction device



Description	Art.-No.	£	Offer £
REMS Pull 2 L Set In a carton.	185600 R220G	830.00	685.00
REMS Pull 2 L Set W In a carton.	185603 R220G	1,230.00	1,079.00



Suction rotor for dust extraction



Description	Art.-No.	£	Offer £
REMS Pull 2 M Set In a carton.	185601 R220G	1,110.00	895.00
REMS Pull 2 M Set D In a carton.	185604 R220G	1,280.00	1,059.00

REMS Picus S1 – the low cost alternative



... now with REMS Simplex 2 drill stand

Robust, handy drill stand for core drilling up to Ø 200 mm. Drill column made of rigid, unbendable square precision steel tube Ø 50 mm, cold solidified, with extra narrow tolerance, for low-vibration guiding of the slide

REMS Picus S1 Basic-Pack

Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete up to ≤ Ø 102 (132) mm, masonry and other materials up to ≤ Ø 162 mm. For dry or wet drilling, hand held or with drill stand. Drive unit with drilling crown male connection thread UNC 1 1/4, female connection thread G 1/2, maintenance-free gear with safety slip clutch, 110 V / 230 V, 50 – 60 Hz, 1850 W universal motor. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock Personal protection switch (PRCD). Load speed drilling spindle 580 rpm. Water supply device with adjustable shutoff valve and quick coupling with water stop and 1/2" hose connection. Stabiliser. Drill start aid G 1/2 UDKB with Ø 8 mm drill, size 3 Allen key. Size 32 opened ended wrench. In sturdy steel case. Art.-No. 180010 R220 £ 1,680.00

£ 1,099.00

REMS Picus S1 Set Simplex 2

Same as Art.-No. 180010, but with REMS Simplex 2 drill stand including fastening set for masonry and concrete. Without diamond core drilling crowns. Art.-No. 180032 R220 £ 2,730.00

£ 1,849.00

Speed-Regulation (Patent EP 2 085 191)
The electronic speed control that is being used keeps the selected speed constant, also under load.



One system – 4 applications!
Ideal for plumbers! ... now with REMS Titan drill stand – for highest demands. For core drilling up to Ø 300 mm.



REMS Picus SR Set Titan
Electric diamond core drilling machine with speed regulation. For core drilling in concrete, steel-reinforced concrete up to ≤ Ø 162 (200) mm, masonry and other materials up to ≤ Ø 250 mm. For dry or wet drilling, hand held or with drill stand. Drive machine with drilling crown connection thread UNC 1¼ male, G ½ female, maintenance-free 2-step gear with safety slip clutch, 110 V, 50–60 Hz, 2200 W universal motor. Stepless electronic speed regulation 200 rpm to 500 rpm (1st gear) or 500 rpm to 1200 rpm (2nd gear), overheating protection. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Water supply device with adjustable shut-off valve and quick coupling with water stop and ½" hose connection. Stabiliser. Spacer set. Single open ended wrench size 32. In sturdy steel case. Drill stand REMS Titan including fastening kit for masonry and concrete. Without diamond core drilling crowns.
Art.-No. 183022 R220 £ 3,190.00

£ **2,375.00**

REMS Picus SR Set 62-82-132 Titan
Same as Art.-No. 183022, but with REMS Universal diamond core drilling crowns UDKB Ø 62, 82, 132 mm.
Art.-No. 183023 R220 £ 3,690.00

£ **2,875.00**



REMS Picus S2/3.5 – for core drillings in steel-reinforced concrete etc. up to Ø 300 mm.

REMS Picus S2/3,5 Set Titan
Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed, Ø 40–300 mm. For dry or wet drilling with drill stand. Drive machine with drilling crown male connection thread UNC 1¼, maintenance-free 2-step gear with safety slip clutch, 110 V, 50–60 Hz, 3420 W universal motor. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Rocker switch. Personal protection switch (PRCD). Load speed drilling spindle 320 rpm, 760 rpm. Water supply device with adjustable shutoff valve and quick coupling with water stop and ½" hose connection. Easy loosening ring. Single open-ended wrench size 32. Drill stand REMS Titan including fastening kit for masonry and concrete. Without diamond core drilling crowns. In a box.
Art.-No. 180030 R220 £ 4,870.00

£ **4,099.00**



The low price Starter Set.
Ideal for pipework installers.

REMS UDKB Set 52+112+132
Ø 52, 112, 132 mm
Art.-No. 181102 R £ 680.00

£ **476.00**

REMS UDKB LS Set 52+112+132
Ø 52, 112, 132 mm
Art.-No. 181112 R £ 750.00

£ **525.00**



REMS Universal diamond core drilling crowns / REMS universal diamond core drilling crowns LS (LASER)
For REMS Picus S1, REMS Picus SR, REMS Picus S3, REMS Picus S2/3,5 and other makes

Diamond segments with wedge-shaped cut ("roof shape") for fast, easy and quiet drilling. Specially developed, high quality diamond segments with high diamond content and special bonding for excellent drilling performance and very long life.

¹⁾ Observe the national regulations for the collection and disposal of health hazardous dusts.



Info

REMS Picus DP – Core drilling without water with micro-pulse technology. Clean, simple, fast, e.g. 200 mm in steel-reinforced concrete Ø 62 mm only 5 minutes.

In combination with the REMS Pull 2 M (see page 34) vacuum cleaner, ideal for core drilling in finished rooms, e.g. in residential, office and industrial buildings.

REMS Picus DP Basic-Pack

Electric diamond core drilling machine with micro-pulse technology for core drilling without water in concrete, steel-reinforced concrete ≤ Ø 162 (202) mm, masonry and other materials ≤ Ø 202 mm, hand held or with drill stand. Drive unit with drilling crown male connection thread UNC 1 1/4, female connection thread G 1/2, maintenance-free gear with safety slip clutch, 110 V / 230 V, 50 – 60 Hz, 2200 W universal motor, integrated dust extraction. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Load speed drilling spindle 880 rpm. Stabiliser. Drill start aid G 1/2 TDKB with Ø 8 mm drill, size 3 Allen key. Size 32 opened ended wrench. In sturdy steel case.
Art.-No. 180016 R110G £ 2,670.00

£ **1,939.00**

REMS Picus DP Set Simplex 2

REMS Picus DP Basic-Pack with REMS Simplex 2 drilling stand including tools and fastening set for masonry and concrete.
Art.-No. 180033 R110G £ 3,710.00

£ **2,719.00**

REMS Picus DP Set Titan

REMS Picus DP Basic-Pack with REMS Titan drilling stand including tools and fastening set for masonry and concrete.
Art.-No. 180035 R110G £ 4,260.00

£ **2,999.00**

REMS dry diamond core drilling crowns LS (LASER)

Especially for dry drilling with core drilling machines with micro-pulse technology. Universally usable for many materials Ideal for pipework installers.

Universally usable for many materials, hand held or with drill stand. Uniform UNC 1 1/4 female connection thread. Drilling depth 320 mm.

Specially developed, high quality diamond segments with high diamond content and special bonding for excellent drilling performance and very long life. Ideal for universal use in steel-reinforced concrete and masonry.

Diamond segments with diamonds positioned in the bonding agent for fast, easy and quiet drilling. Laser-welded on fully automatic welding machines for consistent high quality of the weld High temperature-resistant, even under extreme temperature load, no desoldering of the segments due to overheating.

Easy loosening ring, for easy loosening of the diamond core drilling crown, as an accessory. Driven by a REMS Picus DP drive unit and suitable drive units of other makes with UNC 1 1/4 outer connecting thread.



Info



**Laser-welded!
High temperature-resistant!**



Ø × drilling depth × connection		Art.-No.	£	Offer £
TDKB LS 32 × 320 × UNC 1 1/4	3	181500 R	178.00	125.00
TDKB LS 42 × 320 × UNC 1 1/4	4	181502 R	166.00	116.00
TDKB LS 52 × 320 × UNC 1 1/4	5	181504 R	177.00	124.00
TDKB LS 62 × 320 × UNC 1 1/4	5	181506 R	193.00	135.00
TDKB LS 72 × 320 × UNC 1 1/4	6	181508 R	219.00	153.00
TDKB LS 82 × 320 × UNC 1 1/4	6	181510 R	237.00	166.00
TDKB LS 92 × 320 × UNC 1 1/4	6	181512 R	267.00	187.00
TDKB LS 102 × 320 × UNC 1 1/4	7	181514 R	273.00	191.00
TDKB LS 112 × 320 × UNC 1 1/4	7	181516 R	288.00	202.00
TDKB LS 122 × 320 × UNC 1 1/4	8	181532 R	331.00	232.00
TDKB LS 127 × 320 × UNC 1 1/4	8	181518 R	343.00	240.00
TDKB LS 132 × 320 × UNC 1 1/4	8	181520 R	352.00	246.00
TDKB LS 142 × 320 × UNC 1 1/4	8	181522 R	377.00	264.00
TDKB LS 152 × 320 × UNC 1 1/4	8	181524 R	420.00	294.00
TDKB LS 162 × 320 × UNC 1 1/4	9	181526 R	445.00	312.00
TDKB LS 182 × 320 × UNC 1 1/4	9	181528 R	491.00	344.00
TDKB LS 202 × 320 × UNC 1 1/4	10	181530 R	520.00	364.00

Sale through specialist dealers.



REMS (U.K.) LIMITED

Unit 5 · Ash Industrial Estate
Flex Meadow · Harlow · Essex CM19 5TJ
Phone +44 12 79 41 36 98
GBR@rems.de
www.rems.de



www.rems.de



@remstools

4 039976 260633